

Lucca Bathroom Wall Light

Installation Instructions

Thank you for purchasing this Lucca Bathroom Wall light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Please keep these instructions for future reference.

This product is rated IP44 and must not be used without the shades attached

Warnings!

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations and mounted out of arms reach.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.


This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

When changing a bulb or adjusting the heads, always switch off at the mains and allow to cool down.

Dispose of used bulbs carefully.

This product is suitable for indoor use only, on normal flammable surfaces, as indicated by this symbol.  e.g. wood, plasterboard and masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Fixing Instructions


Make sure you have the following items which are required to install this light fitting:

Small electrical screwdriver, cross head screwdriver & insulation tape.

The installation of this fitting will be much easier with the help of an assistant.

This product has special protection against the ingress of moisture and is IP44 rated.


This product is suitable for use in Zone 1, Zone 2, and outside Zones of a bathroom. See diagram. **If installing in a bathroom a 30mA RCD must be used - in accordance with IEE Wiring Regulations and the Building Regulations.**

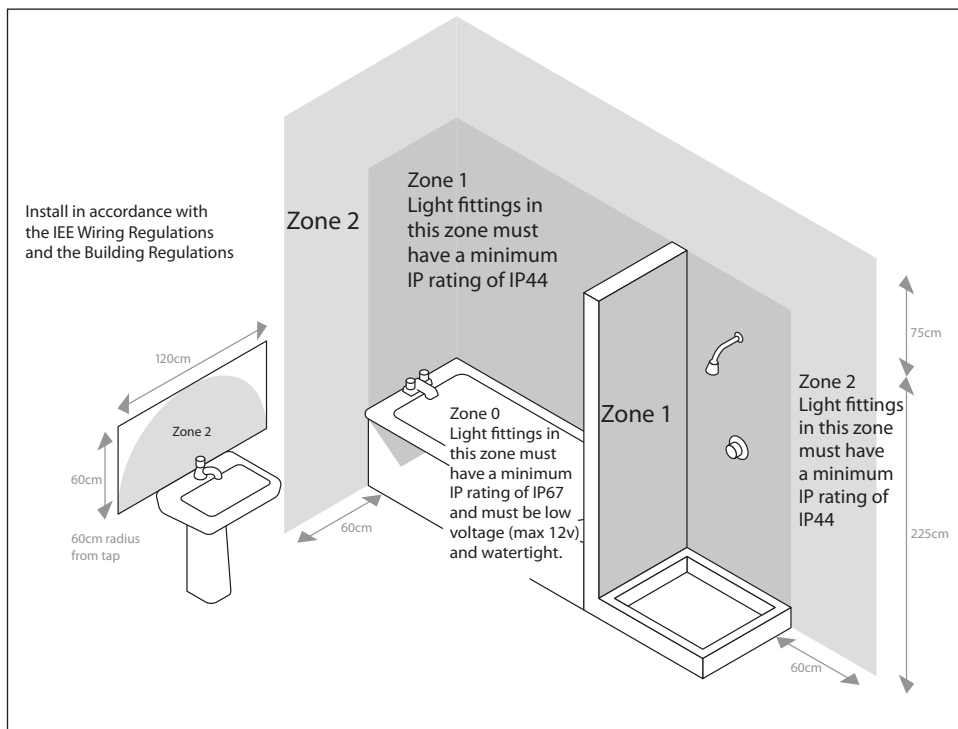


Installation:

- 1) Remove the mounting box from the product by removing the dome nuts and washers.
- 2) Pull terminal block off of retaining pegs in mounting box. Carefully pierce a small hole in the rubber gasket in the centre of the mounting box to allow the cable to pass through.
- 3) Thread the cable through the hole and fix the mounting box to the wall using the screws and plugs supplied. Ensure the switch is at the base of the mounting box. Take care not to damage any concealed wiring.

Wiring

- 1) Connect household Live wire to terminal on terminal block marked 'L'.
- 2) Connect household Neutral wire to terminal on terminal block marked 'N'.
- 3) Connect household Earth wire to Earth wire on fitting, or terminal marked. 
- 4) Check that you have correctly identified the house wires, the connections are tight and that no loose strands have been left out of the connection block.
- 5) Ensuring the lampholder points downwards, fit the product back on to the mounting box and refit washers and dome nuts, tighten dome nuts to secure.

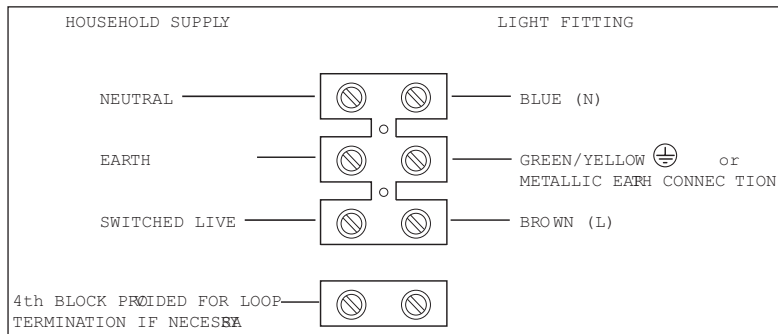

Check that.....


You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

Fitting/Replacing the bulb - 25W max G9 halogen

During use the bulb and light fitting get very hot. Always switch off at the mains and allow the bulb to cool before replacing. Use a cloth when handling bulbs as contact with bare hands will reduce the bulb life. Always use a replacement bulb of the same type and never exceed maximum wattage. Dispose of the used bulb carefully.





Push-in to fit,
Pull-out to remove.

Fitting the glass shades

Screw clear glass shade (B) on to the lampholder followed. Ensure the shade is fully tightened. Fit the specified bulb (C) as listed above. Then place rubber washer (D) over bulb and screw on small shade (E). Ensure both shades are properly seated to form a watertight seal. Do not overtighten either of the shades.

Glass Shades

The glass shades must be replaced if they become cracked or damaged. Do not use product without the glass shades attached.

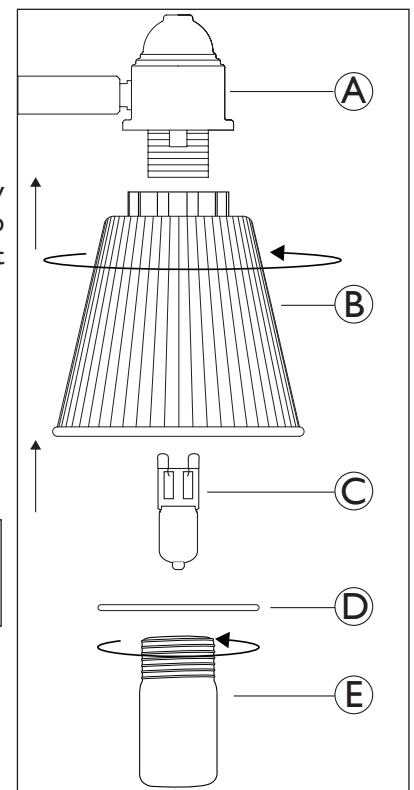

Switch on

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Glass parts - Remove and wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

Safety Information

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing the shades.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945. We will despatch to you, within 7 working days, your missing/damaged part. When phoning please ensure you have the following information available: Name and Address, Daytime Telephone Number, Store and Date of Purchase, Product Reference (inside ceiling cover or on box label), Description of Missing/Damaged Part. This does not affect your statutory rights.