

Nebula 24lt Pendant

Installation and assembly Instructions

Thank you for purchasing this Nebula light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Please keep these instructions for future reference

Warnings!

THIS PRODUCT WILL NEED TO BE FITTED TO A MAIN BEAM, THE WEIGHT OF THE PRODUCT IS 10KGS.

This product is heavy and will require two people to install.

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling.

Dispose of used bulbs carefully.

This product is suitable for indoor use only, on normal flammable surfaces, as indicated by this symbol. 

Please Note:

This product is **not** suitable for use with a dimmer switch.

Fixing Instructions

Make sure you have the following items which are required to install this light fitting:

Small electrical screwdriver, cross head screwdriver & insulation tape.

The installation of this fitting will be much easier with the help of an assistant.

THIS PRODUCT WILL NEED TO BE FITTED TO A MAIN BEAM, THE WEIGHT OF THE PRODUCT IS 10KGS.

Step 1


Before removing the existing fitting, **carefully note the position of each set of wires**. Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L, N, or E. of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. **The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch.**

Step 2

Remove the fixing plate from the ceiling cover and attach to the ceiling using the screws provided. Take care to avoid damaging any concealed wiring and pipes. Ensure ceiling plate is securely attached to a main joist to support the weight.

Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

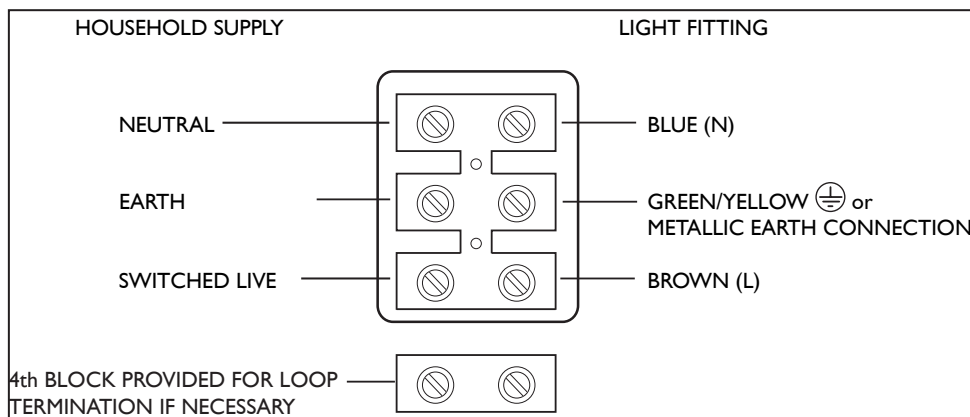

Check that.....

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

Step 4


When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

Step 5

Attach the product to the fixing bracket using the side screws provided, locate the screws in the bracket into the holes in the ceiling cover and tightening the screws to secure.


Height Adjustment

The drop of this product can be reduced. Support the weight of the fitting; loosen allen screw (A). Push the cable upwards until the desired length is reached. Tighten the allen screw and ensure the cable is securely gripped. Gently lower the product and ensure the cable supports the weight without slipping past the screw.

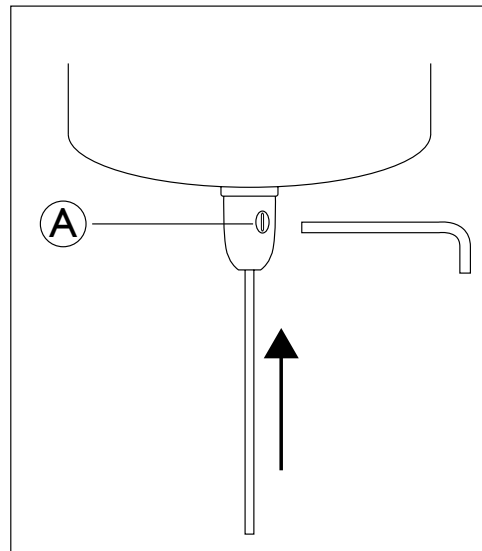

Attaching the Crystal Assemblies

This product comes with 24 crystal assemblies that need to be attached to the product. This is easier to do once the product has been fitted to the ceiling. Push each assembly over the spring to attach. Periodically check fit of assemblies.

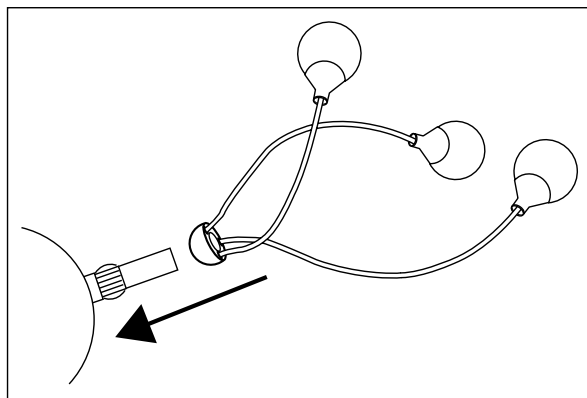

Fitting/Replacing the bulbs

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting. Use a soft cloth to handle bulbs, avoid directly touching the bulbs as this will shorten their life.

Step 6

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.
Glass parts - Remove and wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

Safety Information

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945. We will despatch to you, within 7 working days, your missing/damaged part. When phoning please ensure you have the following information available: Name and Address, Daytime Telephone Number, Store and Date of Purchase, Product Reference (inside ceiling cover or on box label), Description of Missing/Damaged Part. This does not affect your statutory rights.