

Turin Bathroom Wall Light

Installation Instructions

Thank you for purchasing this Turin Bathroom Wall Light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

This product is rated IP44 and must not be used without the shades attached

Please keep these instructions for future use.

Warnings!

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations and mounted out of arms reach.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

When changing a bulb or adjusting the heads, always switch off at the mains and allow to cool down.


Dispose of used bulbs carefully.

This product is suitable for indoor use only for installation on surfaces with normal flammability e.g. wood, plaster-board, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

Installation:

This product has special protection against the ingress of moisture and is IP44 rated.

This product is suitable for use in Zone 1, Zone 2, and outside Zones of a bathroom. See diagram. If installing in a bathroom a 30mA RCD must be used in accordance with IEE Wiring Regulations and the Building Regulations.

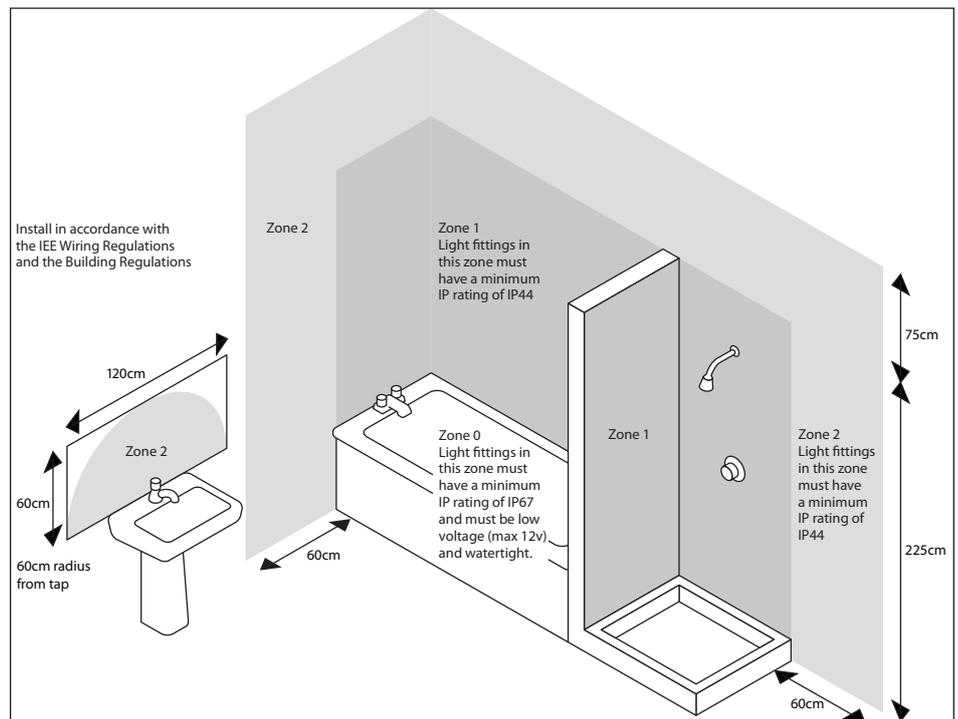

Fixing Instructions

Make sure you have the following items which are required to install this light fitting:

Small electrical screwdriver, cross head screwdriver & insulation tape.

Step 1


Existing wall fittings must be completely removed before installation of a new product. Before removing these fittings, carefully note the position of each set of wires. Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L, N, or E. of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch.

Step 2

Remove the fixing bracket from the product by removing grub screws using the supplied allen key. Carefully pierce a small hole in the rubber gasket in the centre of the fixing bracket to allow the supply cable to pass through. Thread the supply cable through the hole. Attach the fixing bracket to the wall using the screws supplied, ensuring bracket is facing the correct way to allow product to face upwards, the side fixing holes on the bracket will be nearer to the top of the bracket. Take care not to damage any concealed wiring.

Step 3 - Wiring:

- 1) Connect household Live wire to terminal on terminal block marked 'L'.
- 2) Connect household Neutral wire to terminal on terminal block marked 'N'.
- 3) Connect household earth wire (Green/yellow) to Earth wire on fitting, or terminal marked \oplus
- 4) Check that you have correctly identified the house wires, the connections are tight and that no loose strands have been left out of the connection block.
- 5) Wrap the terminal block in tape, 2cm each side of the connections.

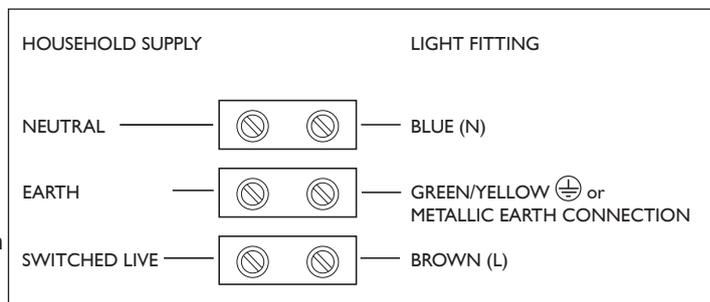

Step 4

Ensuring the lampholder faces upwards, fit the product back on to the mounting bracket and refit the screws. Tighten with supplied allen key.

Fitting/Replacing the bulb - 40W Max E14 Candle


During use the bulb and light fitting get very hot. Always switch off at the mains and allow the bulb to cool before replacing. Always use a replacement bulb of the same type and never exceed maximum wattage. Dispose of the used bulb carefully. Equivalent energy saving bulb can be used, check bulb dimensions in relation to space available.

Attaching the glass shade

Carefully attach the shade by compressing the metal clips with one hand while ensuring the clips are inside the shade and is sitting tight against the rubber seal.


Glass Shade

The glass shade must be replaced if it becomes cracked or damaged. Do not use product without the glass shade attached.



Step 5

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

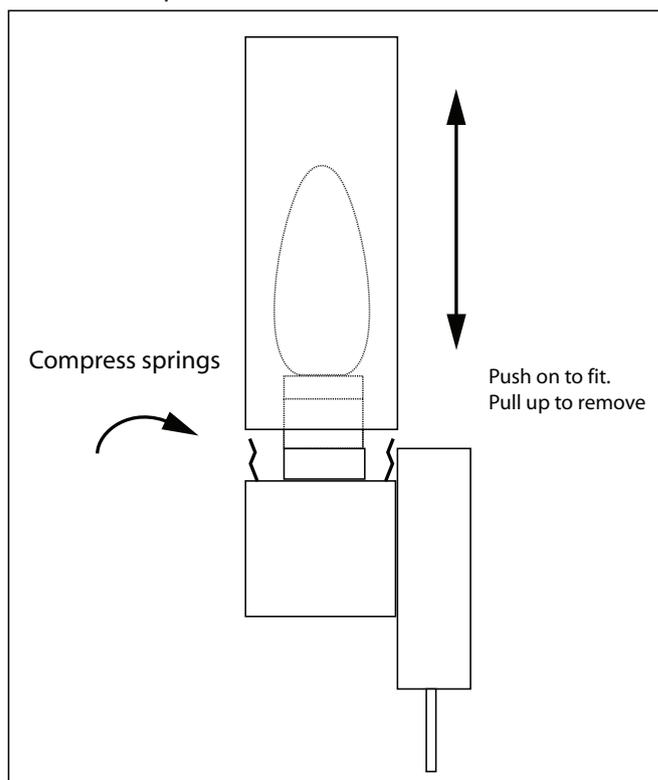

Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.
Glass parts - Clean with a damp cloth. Do not use abrasive materials as these will damage the finish.

Safety Information

For your safety, always switch off the supply before changing lightbulb, cleaning or removing shade.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945. We will despatch to you, within 7 working days, your missing/damaged part. When phoning please ensure you have the following information available: Name and Address, Daytime Telephone Number, Store and Date of Purchase, Product Reference (inside ceiling cover or on box label), Description of Missing/Damaged Part. This does not affect your statutory rights.