

# Oria 5lt Semi Flush Installation Instructions

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Please keep these instructions for future reference

## Warnings!



**This product is Class II (double insulated) and must not be earthed. If there are any incoming earth cables, they must be joined together and well insulated with good quality insulation tape. This is to ensure earth continuity throughout your property.**

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling.

Dispose of used bulbs carefully.

This product is suitable for indoor use only, on normal flammable surfaces, as indicated by this symbol.



## **Please Note:**

This product is **not** suitable for use with a dimmer switch.

## **Fixing Instructions**

Make sure you have the following items which are required to install this light fitting:

Small electrical screwdriver, cross head screwdriver & insulation tape.


The installation of this fitting will be much easier with the help of an assistant.

## **Step 1**

Existing ceiling roses must be completely removed before installation of a new product. Before removing the existing fitting or ceiling rose, **carefully note the position of each set of wires**. Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L or N of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. **The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch.**


## **Step 2**

Remove the fixing bracket (C) from the ceiling cover by removing side screws (D) and attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

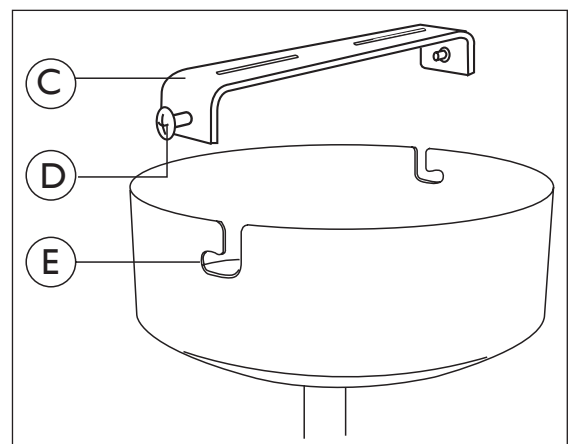

### Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

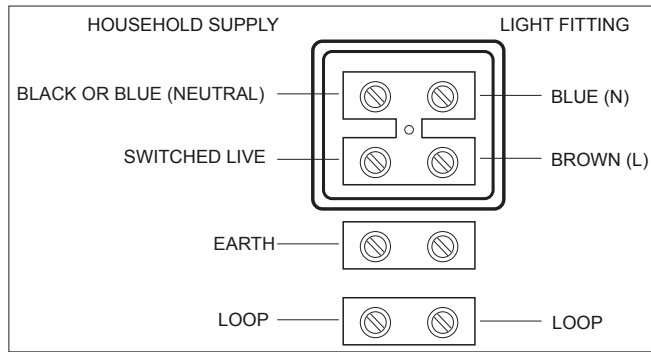

Check that.....

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the connection block.

The lid is fitted back onto the terminal block case.

### Step 4

You must use good quality insulation tape or the spare connection block supplied to terminate the incoming earth cable. A fourth connection block is provided should you need it to make a loop connection. If used in this way, insulate this block from the fitting and other wires.

### Step 5

This product has “L” shaped fixing slots to allow easy fixing to the ceiling strap. Locate the “L” slots (E) around the small screws (D) on the ceiling strap (C) (see diagram in step 2). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

### Fitting/Replacing the bulbs - 20w G4 Low voltage halogen


Use a soft cloth to handle bulbs, avoid directly touching the bulbs as this will shorten their life. When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.

### Attaching the glass shades

To attach the glass shades, cover with a cloth in the case of glass breaking. Carefully locate each shade over the lampholder and push into position over the spring clip.

Periodically check the fit of each shade.

Glass shade shape may differ from that illustrated.

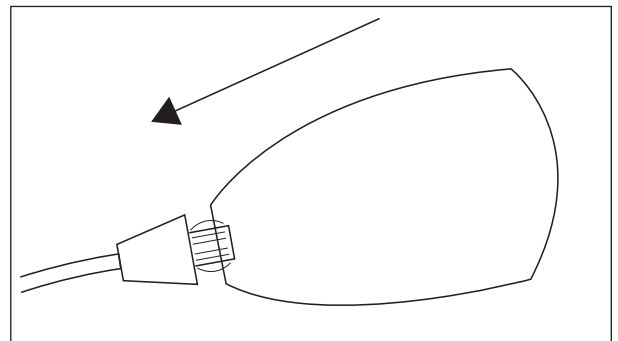

### Step 6

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

### Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Glass parts - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

### Safety Information

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945. We will despatch to you, within 7 working days, your missing/damaged part. When phoning please ensure you have the following information available: Name and Address, Daytime Telephone Number, Store and Date of Purchase, Product Reference (inside ceiling cover or on box label), Description of Missing/Damaged Part. This does not affect your statutory rights.