Recommended bulb (not included)

1 x 2-4 Watt G9 energy efficient LED capsule

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.



User manual

Lucca Wall light

Specifications


Max. power: 4W Voltage: 240V, 50Hz IP rating: IP44 Weight: 0.32kg

Please keep these instructions for future reference.

This symbol indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership 171 Victoria Street London SW1E 5NN johnlewis.com

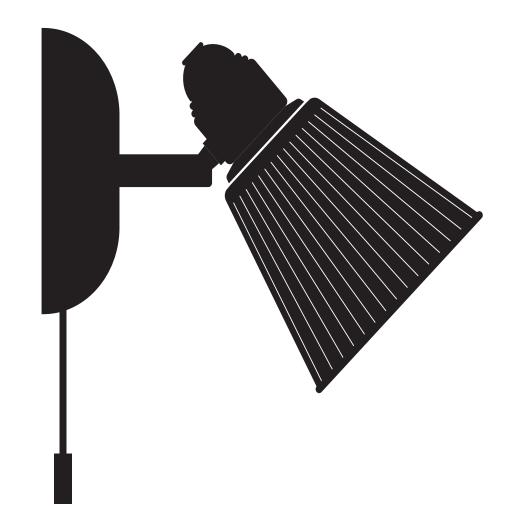

Thank you for purchasing this Lucca wall light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electric shock switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.


This light fitting should be connected to a 5 amp fused circuit.


If replacing an existing fitting, make a note of the connections.

This product is suitable for installation indoors only, and on surfaces with normal flammability e.g. wood. It is not suitable for use on highly flammable surfaces (e.g. textiles).

Ensure the correct fixings are used for the installation surface.

For your safety, always switch off the supply before cleaning.

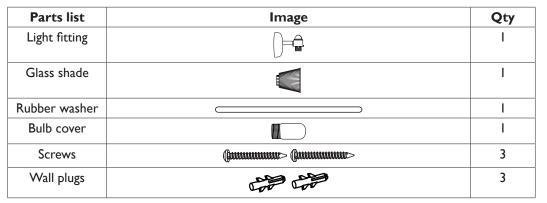

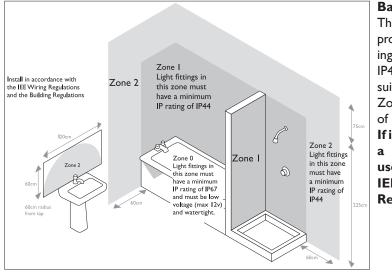

Bathroom use

This product has special protection against the ingress of moisture and is IP44 rated. This product is suitable for use in Zone 1, Zone 2, and outside Zones of a bathroom. See diagram. If installing in a bathroom a 30mA RCD must be used - in accordance with IEE Wiring and Building Regulations.

Assembly

Refer to assembly drawings. Carefully unpack the carton, making sure all the parts are present before assembly.

Step 1

Remove the mounting box from the product by removing the dome nuts and washers.

Step 2


Pull terminal block off of retaining pegs in mounting box. Carefully pierce a small hole in the rubber gasket in the centre of the mounting box to allow the cable to pass through.

Step 3

Thread the cable through the hole and fix the mounting box to the wall using the screws and plugs supplied. Ensure the switch is at the base of the mounting box. Take care not to damage any concealed wiring.

Step 4

Having identified the household wiring from your existing light fitting, connect to the terminal block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed.



Check that

You have correctly identified the house wires. The connections are tight.

No loose strands have been left out of the connection block.

Step 5

Screw clear glass shade (B) on to the lampholder (A). Ensure the shade is fully tightened.

Fit the bulb (C) per the details overleaf, ensuring you use a cloth or glove - do not use bare hands. Do not exceed the stated rated power, or use a different shaped bulb.

Then place rubber washer (D) over bulb and screw on small shade (E). Ensure both shades are properly seated to form a watertight seal. Do not overtighten either of the shades.

The glass shades must be replaced if they become cracked or damaged.

Do not use product without the glass shades attached. This is the symbol that denotes this requirement:



Step 7

ſ

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care instructions

We recommend cleaning with a soft dry cloth. Glass parts can be cleaned with a damp cloth. Do not use abrasive materials as these will damage the finish.

