



FRIEDA LARGE G9 WALL FITTING

IL2315

Thank you for buying this **Frieda Large G9** wall fitting.
Please read the instructions and warnings carefully before use to ensure safe and satisfactory operation of this product.


This product is Class II

Warnings

- * It is recommended that this fitting is installed by a qualified electrician.
- * This fitting should be fitted in accordance with IEE Wiring Regulations and the Building Regulations.
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * If you are in doubt please consult a qualified electrician.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting should be fitted to a lighting supply with protected 5 amp fuse or equivalent circuit breaker.
- *  Indicates that the fitting is suitable for mounting on normally flammable surfaces.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.
- * This fitting is designed for use with self-shielded tungsten halogen lamps only = 

Instructions for use

1. Ensure the house electricity supply is off at the fuse board.
2. If removing an existing fitting, first note down all wiring connections.
3. Remove mounting bracket from fitting by undoing fixing screws at the side of fitting cup.
4. Using mounting plate as a template, mark and then drill the fixing holes in the wall. (ensure holes are drilled into a solid wall or other suitable surface) **Take care not to damage wiring.**
5. Attach the bracket to the wall using suitable screws. ① Make sure no wires are trapped in the process.
6. Lever open the terminal block box cover with a screwdriver then feed supply cable through rubber sleeving and make electrical connections as follows: ②
Connect supply live (normally brown or red) to fitting live (marked "L") on the terminal block.
Connect supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.
NO EARTH is to be connected to any part of this fitting. If there are earth wires present in the wall then these must be terminated into a separate terminal block (not supplied) to ensure that continuity of the earth circuit is maintained.
Ensure electrical connections are tight and no loose strands of wire are left out of connector block and that the rubber sleeve is correctly located.
7. Carefully offer fitting over mounting bracket then secure in place with screws removed from earlier. ③
8. Fit bulbs, type and wattage as indicated on the fitting. ④ **The wattage indicated must not be exceeded.** Do not touch halogen bulbs with bare hands, as this will shorten their life.
9. Switch on the electricity supply at the fuse board.

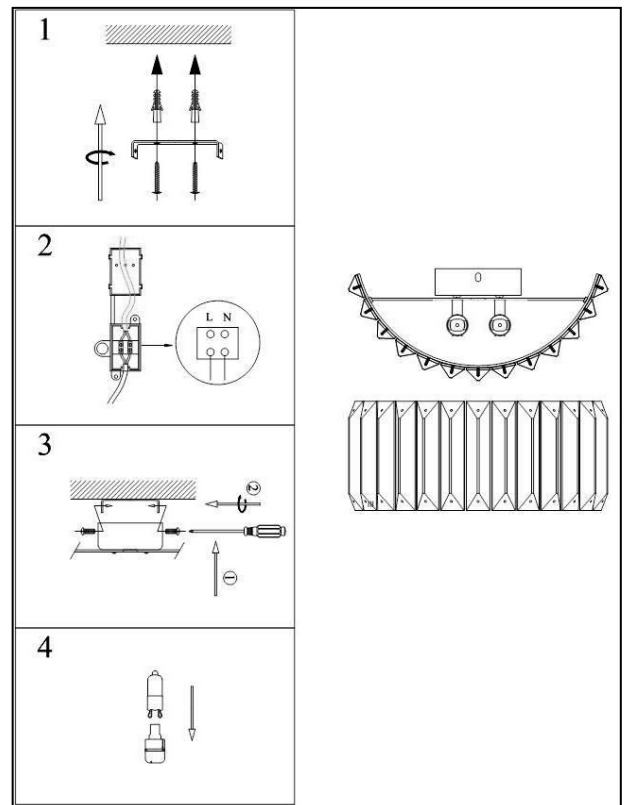

Please retain this information leaflet for future reference

GENERAL INFORMATION

This fitting is designed for internal use only
Do not use polished or abrasive cleaner – just a soft dry cloth.