

## **ISADORA 701 65716**

Thank you for purchasing this Isadora fitting. Please read the instructions and warnings carefully before use to ensure safe and satisfactory operation of this product. Please remove all packaging before use.

### **WARNING**

- It is recommended that this fitting is installed by a qualified electrician.  
This product must be installed in accordance with current building regulations and the current edition IEE wiring regulations.
- To prevent electrocution, switch off at mains supply before installing or maintaining this fitting.
- This product is class I and must be earthed.
- If you have any doubts, consult a qualified electrician.
- This product is designed to be mounted on a normally flammable surface, indoor use only.
- When replacing bulbs, isolate the fitting from the electrical supply and allow the bulbs to cool before replacing with the correct type and wattage, never exceed the wattage stated.
- We do not recommend adjusting the length of the chain on this product, if adjustment is required please consult a qualified electrician.

If you are installing your new fitting in place of an existing fitting, you may find that both ring and switched circuits exist. Before disconnecting the existing fitting, carefully note the position of each set of cables in relation to L. N. E. If a ring circuit exists there will be a fourth set of wires (usually red) that are not connected to L. N. or E.- this circuit must be kept together in a separate insulated terminal block

### **PARTS LIST**

1 X LIGHT FITTING


2 X SCREWS AND RAWPLUGS

1 X CEILING BRACKET

1 X CONNECTOR BLOCK

### **FITTING YOUR CEILING FITTING:**

1. Ensure the house electricity supply is switched off at the supply.
2. Attach the ceiling bracket to required position on the ceiling using the 2 x screws and raw plugs provided.
3. While supporting the weight of the chandelier, connect the mains wires to the connector block by following the wiring code below.  
Ensure there are no loose strands of wire exposed and wrap the connector block with 2 layers of insulating tape, continuing at least 2cm either side of the connector block.




Observe the correct colour code:

Brown – Live (L)

Blue – Neutral (N)

Green/Yellow – Earth (E)

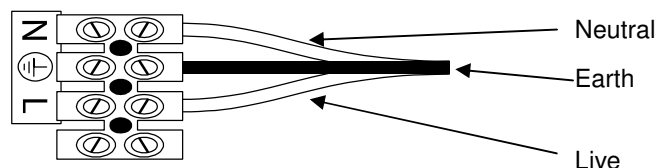

4. Attach the Ceiling rose to the Bracket, ensuring all wiring is safely inside the Ceiling rose.
5. You can now insert the correct type bulb, observing the maximum stated wattage.
6. The Electricity supply can now be turned back on.



**Please retain this information leaflet for future reference**

John Lewis Partnership 171 Victoria Street London SW1E 5NN

[www.johnlewis.com](http://www.johnlewis.com)