

Recommended bulb

1 x 32 Watt LED module

This product contains a non-replaceable LED Module. If the LEDs become damaged then the whole product must be replaced.

When moving or cleaning, always switch off at the mains and allow the module to cool before handling.

Specifications

Max. power: 32W

Voltage: 240V, 50Hz

IP rating: IP20

Weight: 1.14kg


1294 lumen output

Colour temperature: Warm white (3000K)



Please retain these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com


Made in China

John Lewis

User manual

Zephyr

Pendant light

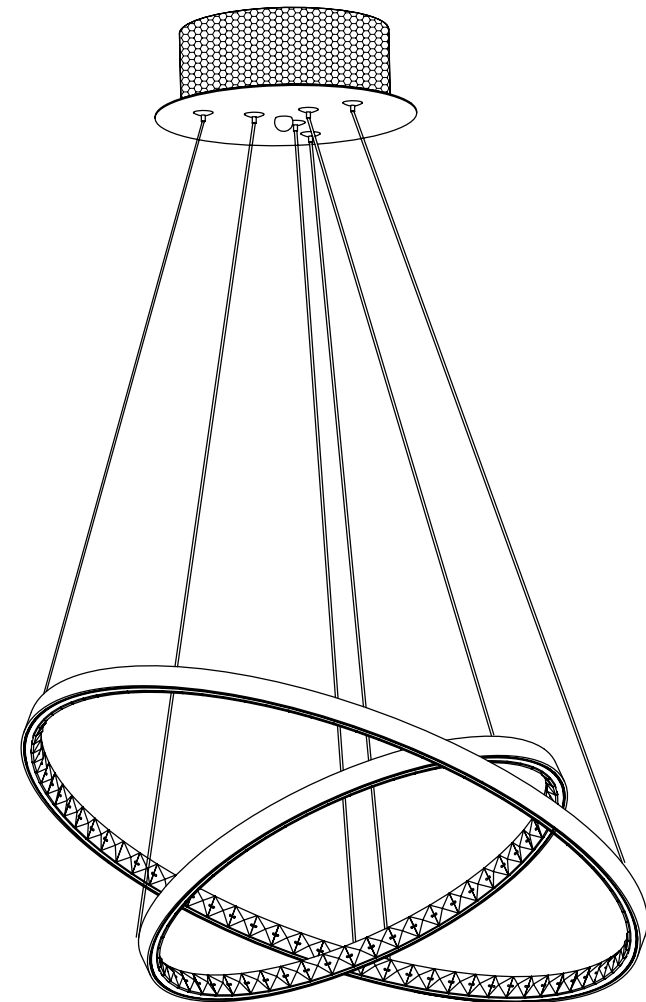





13/08/2018

Thank you for purchasing this Zephyr Pendant light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

- ☐ This product is Class II (double insulated) and must not be earthed.
- For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-declaration scheme. Further information is available online or from your Local Authority
- To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.
- This light fitting should be connected to a 5 amp fused circuit.
- This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).
- Ensure the correct fixings are used for the installation surface.
- For your safety, always switch off the supply before cleaning or removing.

Parts list

Parts list	Image	Qty
Light fitting		1
Screws		2
Wall plugs		2
Spare crystals		5

Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly. **NOTE:** To avoid tangling the wires, do not remove cable ties until after fitting is installed.

Step 1

Before removing the existing fitting, carefully note the position of each set of wires.




Figure 1

Step 2

This product has been preset to a predetermined height with the rings set at angles for optimum appearance and light distribution. Height adjustment is easier to complete before installing the product. To reduce the drop of this pendant, push the cables up into the ceiling cover. To increase the drop, press button A at the top of each cable.




Figure 2

Step 3

Remove the fixing bracket (A) from the ceiling cover by removing the side screws and washers (B). See Fig. 2





Figure 3

Step 4

Attach to the ceiling using the screws provided. Refer to Fig. 3. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 5

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product as shown. When completed, ensure that there are no bare or loose strands of wire exposed.

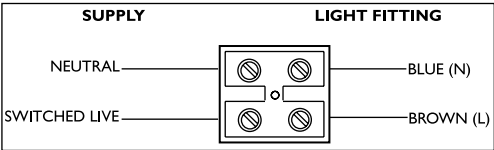

Check that

- You have correctly identified the house wires.
- The connections are tight.
- No loose strands have been left out of the connection block.




Figure 4

Step 6

See Fig. 2: This product has “L” shaped fixing slots to allow easy fixing to the ceiling strap. Locate the “L” slots (C) around the small screws and washers (B) on the ceiling strap (A). See Fig. 4: Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring. Lastly, remove the cable ties on cables.

Step 7

This product is supplied with 5 spare crystals. Simply click them in place to fit them onto the product if necessary.

Step 8

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.