




# DUAL GLASS 3LT BAR


## USER GUIDE

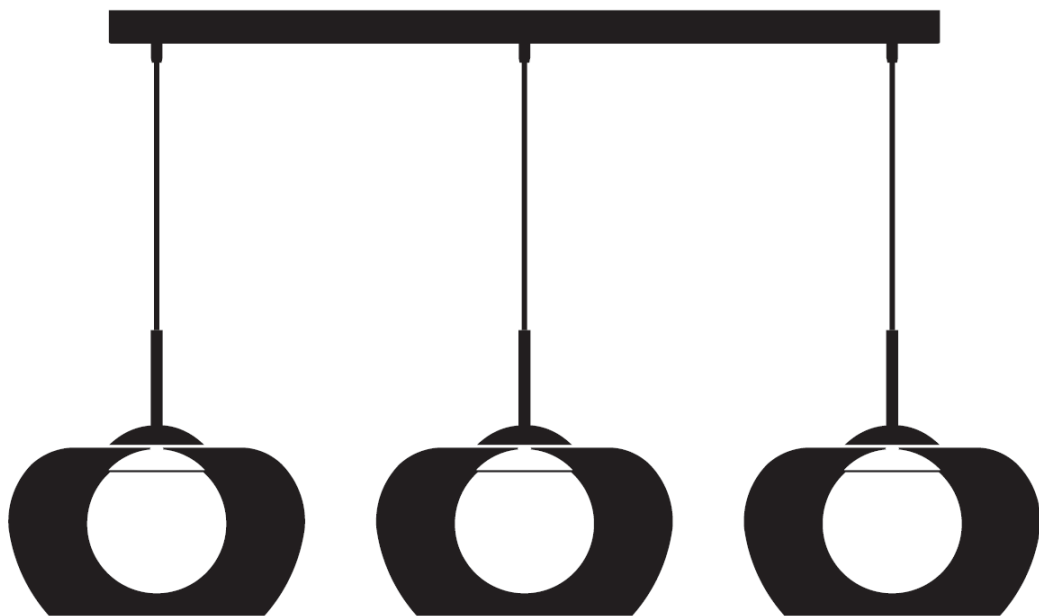

Introduction

Thank you for purchasing this **Dual glass 3lt bar.**  
Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.


Warnings



For your safety, this product must be installed in accordance with local Building Regulations.





If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or phone your Local Authority.

To prevent electric shock, switch off the mains supply before installing or maintaining this product. Ensure other persons cannot restore the electricity supply without your knowledge.

Always use the correct bulb type with the correct wattage as indicated in the specification table. This product is Class I =  and should be fitted to a lighting Supply (with earth) protected by a 5 amp fuse or equivalent circuit breaker. When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

Caution! The bulb and surrounding parts can become hot during use.


For indoor use only.

Parts list	Description	Image	Quantity
<b>A</b>	Mounting bracket		1
<b>B</b>	Screw Fixings		2
<b>C</b>	Light fitting		1
<b>D</b>	Inner shade glass		3

Height Adjustment: This fitting is height adjustable at point of installation only. No attempt must be made to adjust the height once it has been attached to the ceiling. If adjustment is required at a later date the fitting must be isolated from the mains and removed from the ceiling first. Lay the fitting on a clear covered surface. Using a suitably sized flat bladed screwdriver loosen the plastic screw clamp under the ceiling cup, also undo the screws or clamp located in the ceiling cup. Carefully pull the cable through the ceiling cup to the desired height and then retighten all screws to ensure that clamps are fully secured.


1

A B



Remove mounting bracket (A) from fitting by removing the retaining screws and any washers, retain for later. Using the mounting bracket as a template, mark and then drill the fixing holes in the mounting surface. (ensure the screws (B) are firmly fixed into a solid or other suitable mounting and not just the plasterboard.) Take care not to damage wiring. Attach mounting bracket to the mounting surface using suitable fixings. Do not attach fitting to mounting bracket at this stage. Make sure no wires are trapped in the process.

2




Ensuring the power has been isolated, connect the electrical supply wires to the connector blocks corresponding terminals. Support the fitting weight and make the electrical connection as follows:

- Connect the supply live (normally brown or red) to fitting live (marked "L") on the terminal block housing.
- Connect the supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block housing.
- Connect supply earth (normally green/yellow or unsheathed) to earth (marked "E") on terminal block.

Please note that residential wiring can vary, if you are unsure about any part of the electrical installation please consult a qualified electrician. Ensure electrical connections are tight and no loose strands of wire protrude from the terminal block.


3



Carefully lower the outer shade glass over the lamp holder section until it comes to rest at the top of the shade with the threaded connection protruding through the hole in the top. Slide the decorative metal top-plate down the electrical cable and over the thread section. Slide the small metal connection rod down the cable and rotate on to the exposed threads until the shade assembly is secured. Take care not to let any of the components collide with the shade or over tighten the connections as this may cause damage to the fitting.

4

C




Excess cable must be carefully located inside the ceiling cup or within the ceiling cavity itself. Carefully offer fitting (A) over mounting bracket then secure in place with the screws and any washers removed earlier. Take care not to damage the wiring.

Fit the bulb: type and wattage as indicated on the fitting. **The wattage must not be exceeded.**

5

D






Fit the shades by positioning over the top of the lamp holder section, aligning the threads and rotating into position until secure. If cross-threading occurs, undo and start again. Take care not to over tighten as this may cause damage to the fitting. Ensure the assembly has been fully secured before leaving unattended.

Once installation is complete, the house electricity may be restored at the fuse box.







Caring for your product	<p>We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.</p> <p>Replace bulb from John Lewis or established brand of the same type and compatibility.</p>
Aftercare and Troubleshooting	<p>If you experience any unresolvable technical issues with the product, contact your nearest John Lewis &amp; Partners shop or John Lewis &amp; Partner Technical Support on 03301 230106.</p> <p>Why is the light not working when switched on? Check your power supply is switched on Turn off light and check that the bulb is inserted correctly Check the bulb is still in working order.</p>
Specification	<p>Max. power: 5W LED (300-450 lumen) Voltage: 220–240V, 50Hz IP rating: 20 Weight: 3.5kg</p> <p></p>
5 year guarantee	<p>At John Lewis &amp; Partners we test every light to high quality standards so we are able to offer you a 5 year guarantee.</p>
Recycling	<p>This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis &amp; Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit <a href="http://www.recycle-more.co.uk">www.recycle-more.co.uk</a>.</p> <p></p>
<p>John Lewis Partnership 171 Victoria Street London SW1E 5NN <a href="http://johnlewis.com">johnlewis.com</a> Made in China</p> <p>Please retain these instructions for future reference.</p>	