



Lucca 3lt Bathroom Spotlight

Installation Instructions

Thank you for purchasing this Lucca Spotlight. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Please keep these instructions for future use.

This product is rated IP44 and must not be used without the shades attached

Warnings!

This is a Class I product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations and mounted out of arms reach.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.


When changing a bulb or adjusting the heads, always switch off at the mains and allow to cool down.

Dispose of used bulbs carefully.

This product is suitable for indoor use only, on normal flammable surfaces, as indicated by this symbol. e.g. wood, plasterboard and masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).



Siting Instructions





THIS LIGHT MUST NOT BE POSITIONED ANY CLOSER THAN 0.5M (50CM) TO THE ILLUMINATED SURFACE.

Location of Installation

These fittings are designed for use in bathrooms. They have special protection against the ingress of moisture and are IP44 rated fittings. They are suitable for use in Zone 1, Zone 2, and Outside Zones.

If this unit is being fitted in Zone 1, a 30mA RCD must be used - in accordance with IEE Wiring Regulations.

Install in accordance with the IEE Wiring Regulations and the Building Regulations

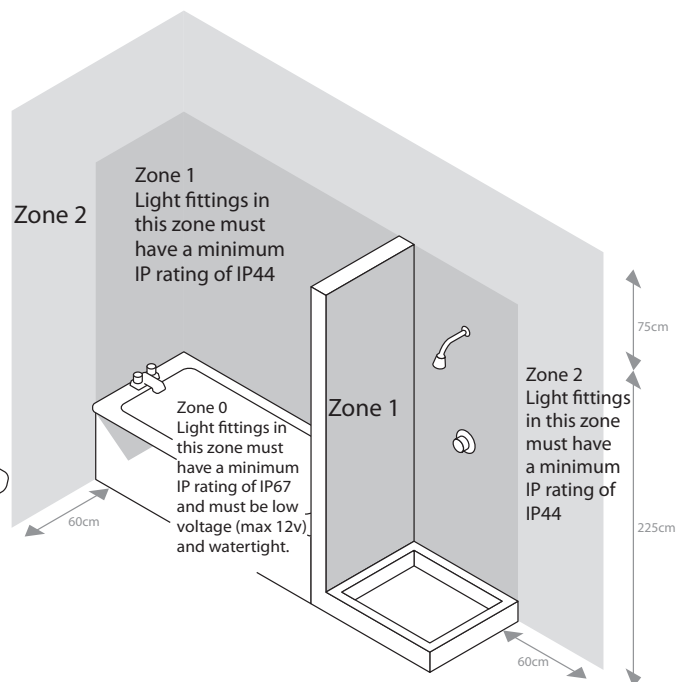

Fixing Instructions

Make sure you have the following items which are required to install this light fitting:

Small electrical screwdriver, cross head screwdriver & insulation tape.

Step 1


Existing ceiling roses must be completely removed before installation of a new product. Before removing the existing fitting or ceiling rose, carefully note the position of each set of wires. Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L, N, or E. of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. **The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch.**

Step 2

Remove the fixing bracket from the ceiling cover and attach to the ceiling using the screws provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

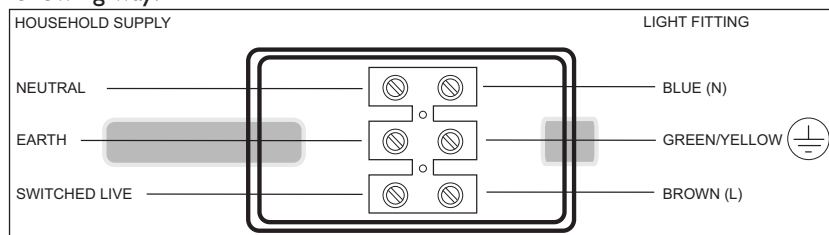

Check that.....

You have correctly identified the house wires.
The connections are tight.

No loose strands have been left out of the connection block.

The lid is fitted back onto the terminal block case.

Step 4


When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

Step 5

This product has 'L' shaped fixing slots to allow easy fixing to the ceiling strap. Locate the 'L' slots around the small screws on the ceiling strap. Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.

Fitting/Replacing the bulb

During use the bulb and light fitting get very hot. Always switch off at the mains and allow the bulb to cool before replacing. Use a cloth when handling bulbs as contact with bare hands will reduce the bulb life. Always use a replacement bulb of the same type and never exceed maximum wattage. Dispose of the used bulb carefully.




Push-in to fit,
Pull-out to remove.

Fitting the glass shades

Screw clear glass shade (B) on to the lampholder followed. Ensure the shade is fully tightened. Fit the specified bulb (C) as listed above. Then place rubber washer (C) over bulb and screw on small shade (E). Ensure both shades are properly seated to form a watertight seal. Do not overtighten either of the shades.

Glass Shades

The glass shades must be replaced if they become cracked or damaged.
Do not use product without glass shades attached.



Switch on

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Glass parts - Remove and wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

Safety Information

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945. We will despatch to you, within 7 working days, your missing/damaged part. When phoning please ensure you have the following information available: Name and Address, Daytime Telephone Number, Store and Date of Purchase, Product Reference (inside ceiling cover or on box label), Description of Missing/Damaged Part. This does not affect your statutory rights.

