

# Jubilee 5lt Pendant Installation Instructions

Thank you for purchasing this Jubilee light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Please keep these instructions for future reference

## Warnings!

**This is a Class I product and must be earthed.**

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling.

Dispose of used bulbs carefully.

This product is suitable for indoor use only, on normal flammable surfaces, as indicated by this symbol.



## Fixing Instructions

Make sure you have the following items which are required to install this light fitting:

Small electrical screwdriver, cross head screwdriver & insulation tape.

## Repositioning Arms


To reduce the packaging, the arms on this fitting have been deliberately moved out of position. Before installation, the arms must be correctly re-positioned by hand into equally spaced positions. Each arm has a spring washer fitted to it to enable the arm to be re-positioned without the need for loosening and retightening the nut. Simply rotate each arm into the correct position.

## Step 1

Existing ceiling roses must be completely removed before installation of a new product. Before removing the existing fitting or ceiling rose, **carefully note the position of each set of wires**. Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L, N, or E. of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. **The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch.**


## Step 2

Remove the fixing strap (C) from the fitting by removing side screws (D) and washers (E) (see diagram). Using the screws provided in the fixing pack, secure the strap to the ceiling, making sure that there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

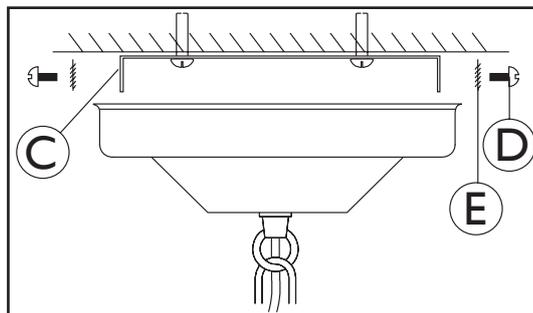

### Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

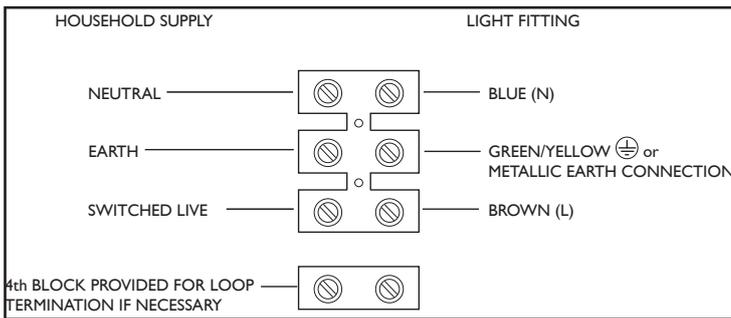

#### Check that.....

You have correctly identified the house wires.  
The connections are tight.  
No loose strands have been left out of the connection block.

### Step 4

When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.


### Step 5

Attach the product to the fixing bracket using side screws (D) and washers (E) (see diagram in step 2), by locating the screws in the bracket into the holes in the ceiling cover and tightening the screws to secure.

Please note that the drop of this product can be reduced by removing chain links. Always ensure that the weight of the fitting is supported by the chain and not the cable.

#### Fitting candle drips

Place candle drip (i) over lampholders (ii)

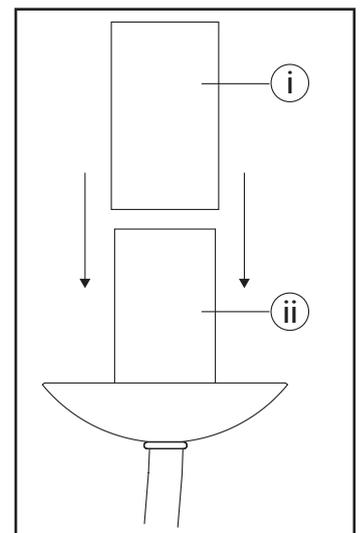

#### Fitting/Replacing the bulbs

Bulb type - 60w Max SES Candle bulb or 12w SES Energy Saver

When changing a bulb, always switch off at the mains and allow to cool before handling. Dispose of used bulbs carefully. Do not exceed the maximum wattage stated.

Lower wattage bulbs and energy saving bulbs may be used with this fitting. Some energy saving bulbs are not suitable for use with a dimmer switch.

### Step 6

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

#### Care and cleaning

Finish - We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

#### Safety Information

For your safety, always switch off the supply before changing lightbulbs or cleaning.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945. We will despatch to you, within 7 working days, your missing/damaged part. When phoning please ensure you have the following information available: Name and Address, Daytime Telephone Number, Store and Date of Purchase, Product Reference (inside ceiling cover or on box label), Description of Missing/Damaged Part. This does not affect your statutory rights.