Recommended bulb (not included)

Ix 9W ES LED GLS

or

Ix 42W ES Eco halogen GLS

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

## **Specifications**

Max. power: 60W Voltage: 240V, 50Hz IP rating: IP20 Weight: 5.55kg



Please keep these instructions for future reference.

This symbol indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact the Product Helpline on (01202) 690945.

John Lewis Partnership 171 Victoria Street London SWIE 5NN johnlewis.com

Made in China 11/12/2017

# John Lewis

## User manual

Darlington Floor light



Thank you for purchasing this Darlington floor light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

## Warnings!

This is a Class II product and must not be earthed.

Please read these instructions carefully before commencing any work.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electric shock switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

For your safety, always switch off the supply before cleaning or removing the shade.

The lit bulb must be kept 50cm away from any surface, as shown by this symbol:



Parts list	Image	Qty
Light fitting		
Shade		I
Shade ring		I

## **Assembly**

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly. Your standard lamp has been packaged as five separate parts to prevent damage during transit.

#### Step I

Holding the tube (A) firmly, screw on tube (B). Take care not to trap the cable or cross the thread. Then screw on tube (C) followed by tube (D). Check all joints are tight.

#### Step 2

Pull any excess cable through from the underside of the base. It may be necessary to loosen screw in part (E). Turn completed assembly anticlockwise approximately 6 times (Turning the tube anticlockwise first, ensures that the cable will straighten when tubes are fully assembled). Screw assembly in a clockwise direction on to the base. Take care not to trap the cable or cross the thread, firmly tighten the tube by hand.

#### Step 3

Gently pull the remaining slack cable through from the underside of the base. Gently tighten the screw in cable grip (E). This prevents damage to the internal electrical parts in the event the cable

is strained.

#### Step 4


Remove the shade ring from the lampholder, place the shade over the lampholder and refit the shade ring. Tighten to secure the shade in place.

#### Step 5

Fit the bulb per the instructions overleaf. Do not exceed the wattage as recommended as this may cause damage to the light fitting.

#### Step 6

Your standard lamp is now ready to use. Switch on using the floor switch. (F)

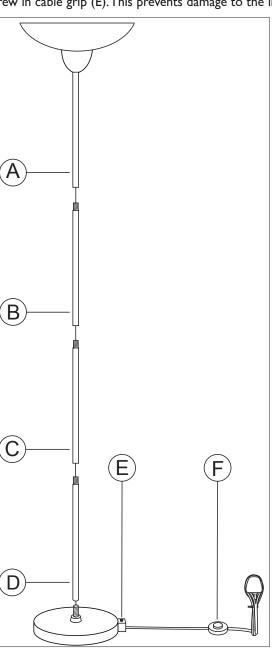

#### **Care instructions**

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.