


Sun Sail Grey

Stock number: 82011808

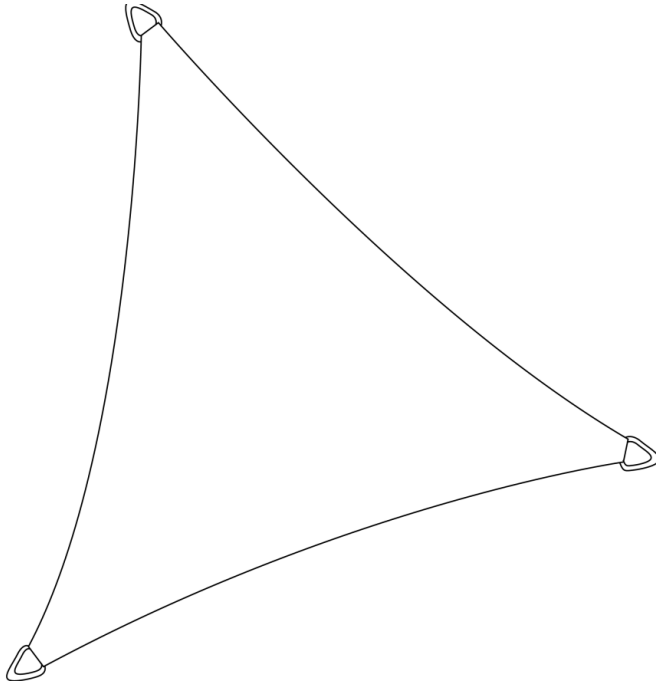

L300 W300cm


Thank you for purchasing the John Lewis and Partners Sun Sail Grey. Please make sure you read the instructions and warnings carefully before proceeding to ensure safe and satisfactory operation of this product. At John Lewis and Partners, we are committed to making great products, from our in-house design team to our buyers, we work together to bring great design to life.

Our expert Product Technologists work collaboratively with our buyers and suppliers to assure the legality, safety and quality of the product we sell.

We are all committed to designing and developing products to the highest industry standard.

We hope you are happy with your product and welcome any feedback or comments you may have.

The John Lewis and Partners team.

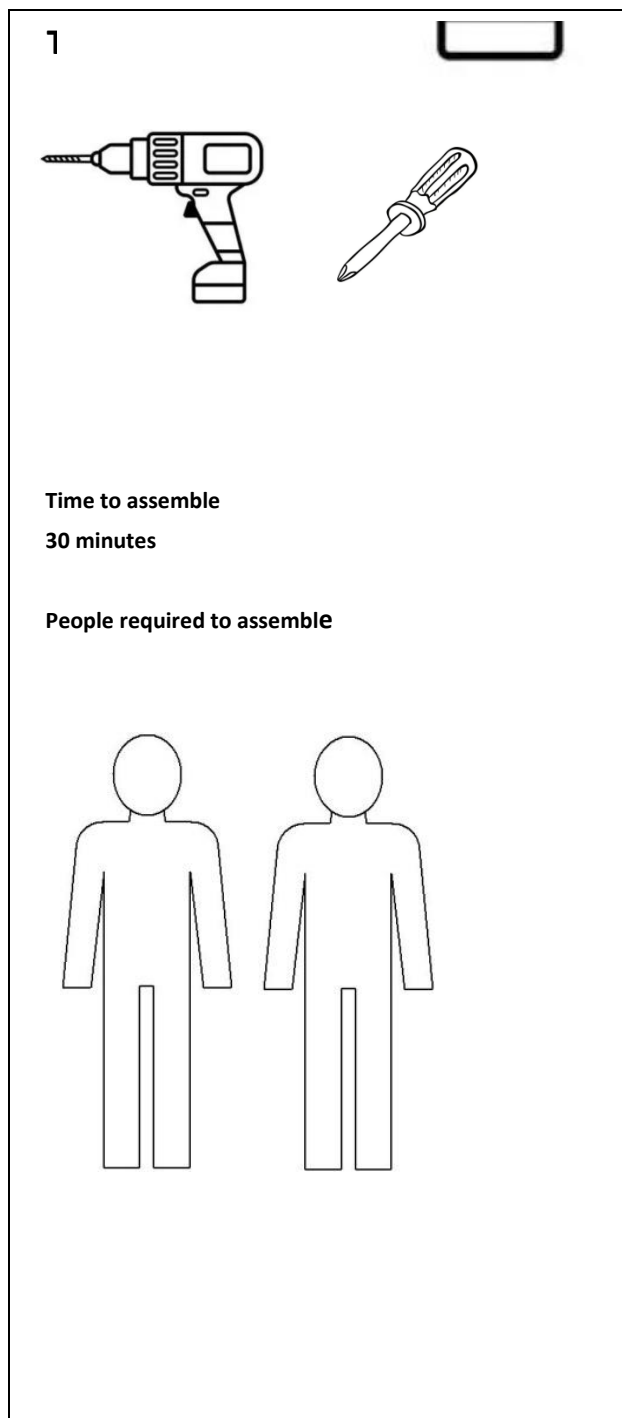

Important safety information

Warnings

△Keep small parts out of reach of children.

△Ensure the product is fully assembled as illustrated before use.







Do

✓ Check the pack and make sure you have all the parts listed.


Don't

✗ Do not change the structure of the sail.

✗ Do not hang any objects on the sunshade sail.

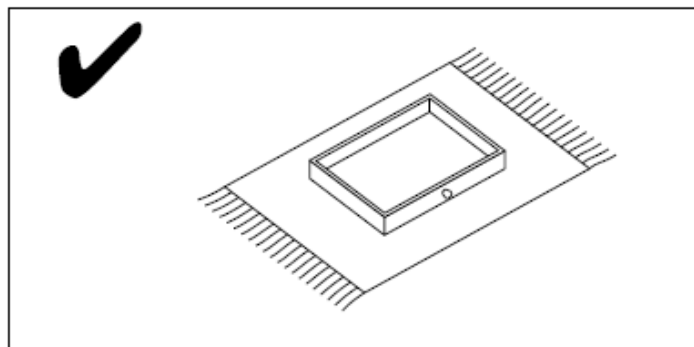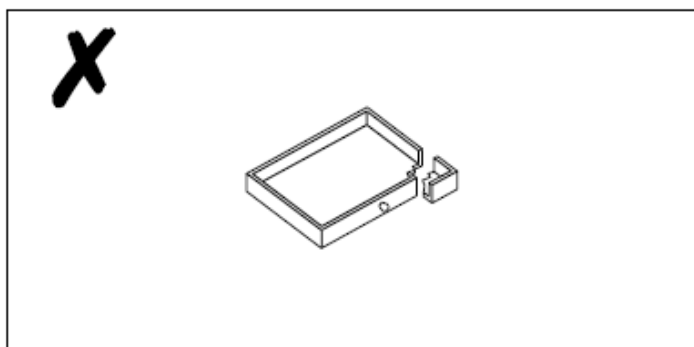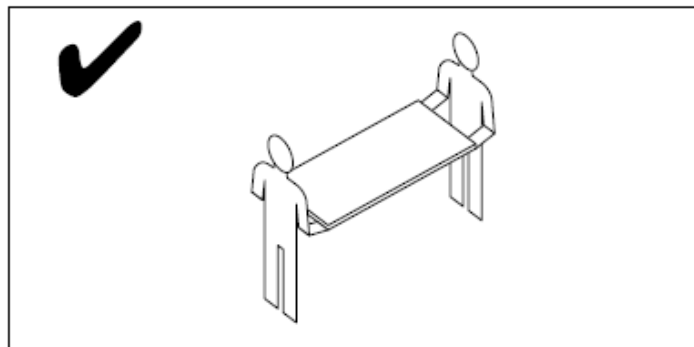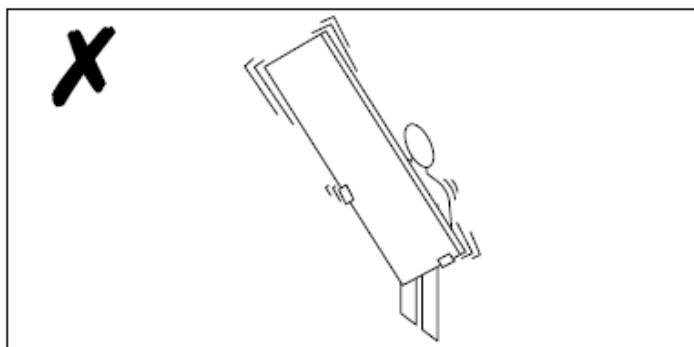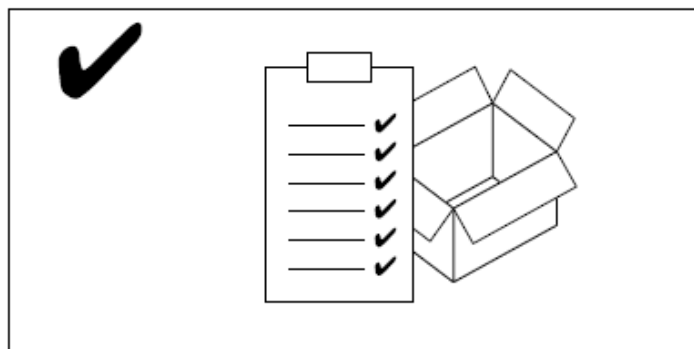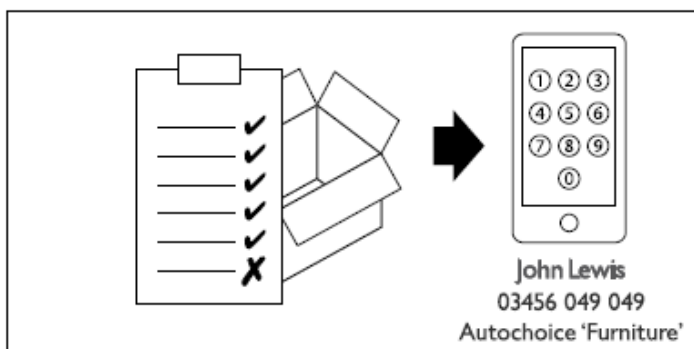

Your Sun sail

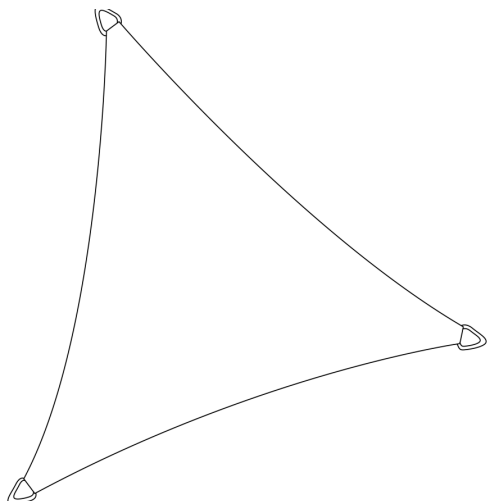


Ref	Description	Dimensions	Qty
1	Sun sail	Length of each edge is 300cm	1






Internal dimensions

Stock number: 82011808

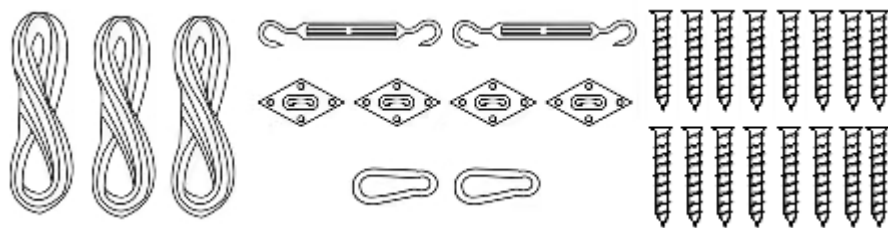Overall size: L300cm at each edge

Fixtures and fittings



Ref	Description	Dimensions	Qty	Image
A	Rope	5m	3	
B	Snap Hook		2	
C	Turnbuckle		2	
D	Pad eye		4	
E	Screw		16	

Product assembly


Sun sail grey

82011808

Step 1

Parts, fittings and tools

Measure and clean the area where the sun sail is to be installed, leave an allowance of 1.5-2ft between the fixing point and the sun sail. The tension at each corner should be 300-500N;


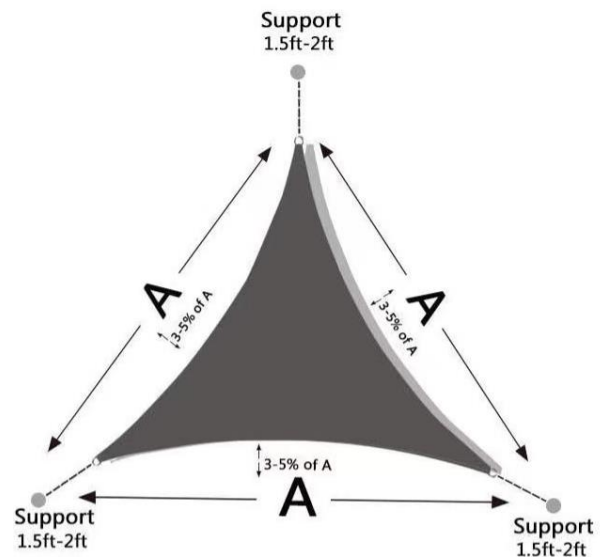


Step 2

Parts, fittings, and tools

1 B C D E

1. Fix pad eye to the area where the sun sail is to be installed.
2. Connect the sun sail (1) with the pad eye (D) by the turnbuckle (C) or the snap hook (B) or both based on actual needs.
You can also fix the sun sail by the rope (A) if applicable.
3. Repeat for other 2 corners, choose hyperbolic style with 2 sides higher than other, allow heavy rain to run off and also makes your shade sail looks more attractive.

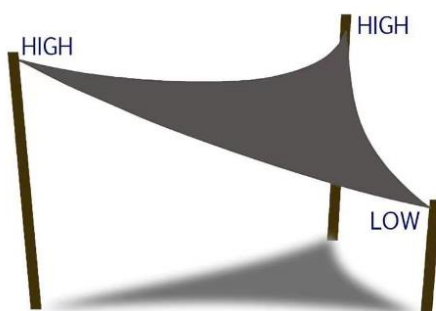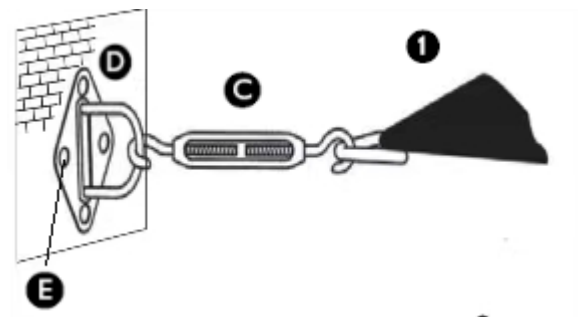

Care guide

Care and maintenance

Fold the sunshade sail in adverse weather conditions (strong winds, rain, frost, snow, etc.)

Do not change the structure of the sail.

Wipe clean only, do not use any sponge; Never use abrasive chemicals or cleaning agents.

Rinse thoroughly and allow to dry.

Safety instructions

Do not hang any objects on the sunshade sail.

Stay away from fire or any glowing objects (candles, barbecues...)

No liability will be accepted for damage or injury caused by incorrectly installed or assembled parasol bases.

Sun sail should not be used in high winds or during inclement weather.

Check if the edges of 3 are correctly fixed.

Periodically check all fixings to ensure none have come loose and re-tighten where necessary.

Retain these instructions for future reference.

Your feedback is very important to us, and we would love to hear your comments on your new furniture. Please visit our website to leave a review. Thank you.