

# AQUALISA


LME9501

## LUMI™


# ELECTRIC SHOWER

## 9.5KW WITH ADJUSTABLE HEAD – CHROME

### DIMENSIONAL DRAWINGS

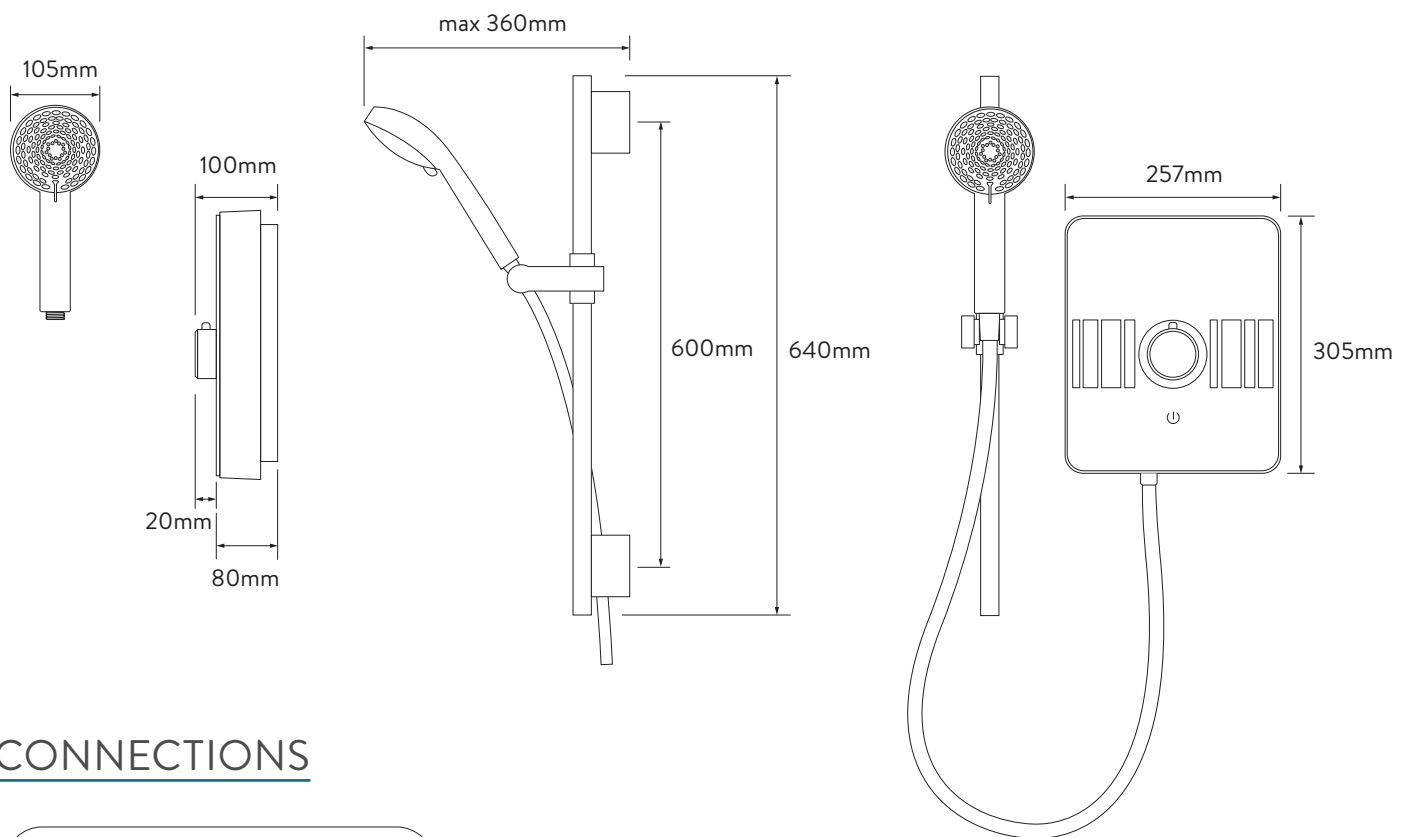

### CONNECTIONS

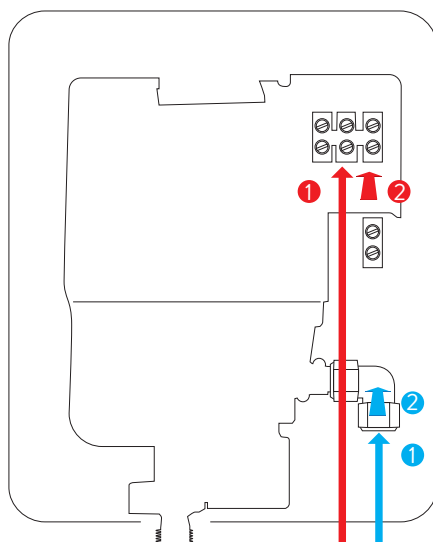

Power

Water

- 1 Bottom Entry
- 2 Rear Entry  
(Rotate water elbow 45°)

# AQUALISA

LME9501

## LUMI™

# ELECTRIC SHOWER

## 9.5KW WITH ADJUSTABLE HEAD – CHROME

### TECHNICAL SPECIFICATIONS

POWER	9.5kW
MINIMUM PRESSURE	0.9 bar (@8lpm)
MAXIMUM PRESSURE	10 bar
RECOMMENDED MAXIMUM PRESSURE	3 bar
WATER ENTRY POINTS	Bottom and rear right only
CABLE ENTRY POINTS	Bottom and rear right only
INLET FITTING CONNECTIONS	15mm compression
OUTLET FITTING CONNECTIONS	1/2" BSP thread
ELECTRICAL REQUIREMENTS	Supply voltage 230 - 240V, MCB rating 40AMP
WATER SYSTEM	Mains cold system
FEATURES	Intuitive single dial
	Illuminated touch start/stop control
	Rotary controls
	Heat safety features
	Power on indication
	Illuminated panel with brightness control
	5 spray patterns
COLOUR	Chrome
GUARANTEE PERIOD	Shower unit - 2 years
	Shower head and kit - 2 years
APPROVALS	CE Marking (LVD; EMC)
	BEAB
	European Water Label
	ERP Directive