

**For use**

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

**Recommended bulb**

1 x 40W

SES Golf

or

1 x 3W

SES LED Energy Efficient Golf

or

1 x 28W

SES Eco Halogen Golf

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.

**Specification**


Maximum wattage: 40W

Voltage: 240V, 50Hz

IP Rating: 20

Weight: 0.57kg



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).


We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945.

John Lewis Partnership  
171 Victoria Street  
London SW1E 5NN  
[johnlewis.com](http://johnlewis.com)

Made in China

John Lewis


# User Manual Fitcham Wall Light

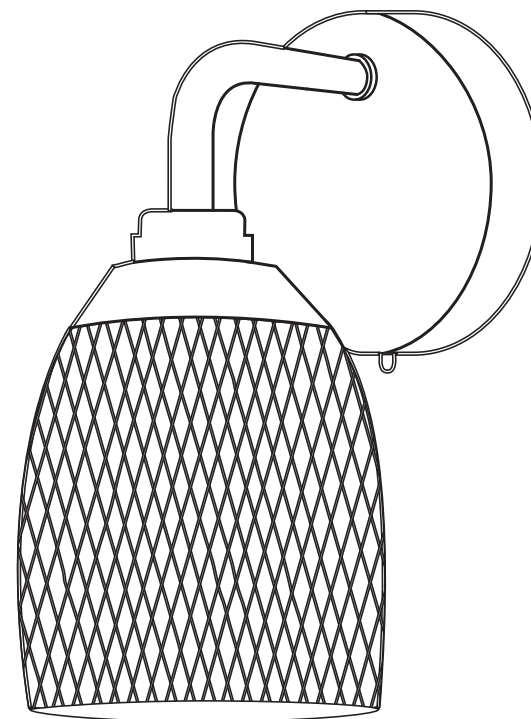

06/10/16

Thank you for purchasing this Fitcham Wall Light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please keep these instructions for future reference.

Warnings!

 **This product is Class II (double insulated) and must not be earthed. If there are any incoming earth cables, they must be joined together and well insulated with good quality insulation tape. This is to ensure earth continuity throughout your property.**

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.






When changing a bulb or adjusting the heads, always switch off at the mains and allow to cool down. Dispose of used bulbs carefully.

This product is suitable for indoor use only.

This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry. It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades. Always take care when handling lightbulbs to avoid injury in case of breakage.

Parts List


Wall back		1	Screws		2
			Wall plugs		2
			Shade		1
Lampholder Cover		1			

Installation Instructions

Carefully unpack the carton, making sure all the parts are present before assembly.


Step 1

Remove the fixing strap (A) from the fitting by removing side screws (B). Using the screws provided in the fixing pack, secure the strap to the wall. Take care to avoid damaging any concealed wiring and pipes. See. Fig. 1.

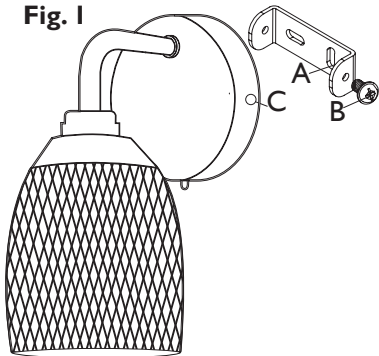


Step 2

Attach to the wall using the screws provided. Refer to Fig. 2. Make care to avoid damaging any concealed wiring and pipes.

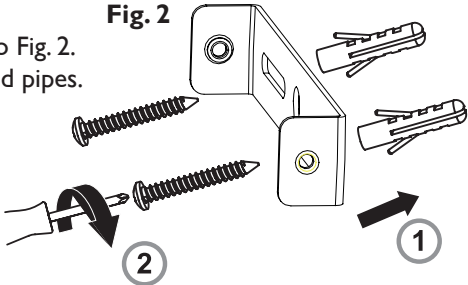

Step 3

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

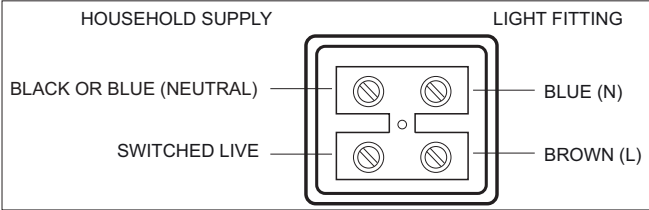

Check that.....

You have correctly identified the house wires.

The connections are tight.

No loose strands have been left out of the terminal block.

The lid is fitted back onto the terminal block case.

All exposed areas of the connection block are covered with 2 layers of good quality insulation tape

Step 4

Attach the product to the fixing bracket using side screws (B -See Fig. 1), by locating the screws in the bracket into the holes in the sides of the fitting (C) and tightening the screws to secure. Take care not to trap any wiring.

Step 5: Fitting the shade

Place the shade (D) over the threaded lampholder (E), followed by the lampholder cover (F). Secure in place by fitting the shade ring (G). Do not overtighten. See Fig. 3.

Step 6

Fit the bulb as per the details overleaf.

Step 7

Replace fuse or circuit breaker and switch on using the toggle switch on the base of the wall back. Your light is now ready for use.

