

## Recommended bulb

1 x 28W  
E14 ECO CANDLE  
or

1 x 3W  
SES LED ENERGY EFFICIENT CANDLE CLEAR

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.


## Specifications

Maximum Power: 28W  
Voltage: 240V, 50Hz  
IP Rating: IP20  
Weight: 0.42kg



Please keep these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945.

John Lewis Partnership  
171 Victoria Street  
London SW1E 5NN  
[johnlewis.com](http://johnlewis.com)

Made in China

John Lewis

User manual

Devon

Wall light



24/07/2017





Thank you for purchasing this Devon wall light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

**Warnings!**

**This is a Class I product and must be earthed.**

Please read these instructions carefully before commencing any work.  
It is recommended that this fitting is installed by a qualified electrician.  
Install in accordance with the IEE Wiring regulations and the Building Regulations.  
To prevent electrocution switch off at mains supply before installing or maintaining this fitting.  
Ensure other persons cannot restore the electrical supply without your knowledge.  
If you are in any doubt, please consult a qualified electrician.  
This light fitting should be connected to a 5 amp fused circuit.  
If replacing an existing fitting, make a note of the connections.  
This product is suitable for installation on surfaces with normal flammability e.g. wood, plasterboard, masonry.  
It is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).  
For your safety, always switch off the supply before cleaning or removing the shade.

**Parts List**

Light Fitting		1	Screws		2
			Wall Plugs		2
			Wall Bracket		1


**Assembly**

Make sure you have the following items which are required to install this light fitting:  
Small electrical screwdriver, cross head screwdriver & insulation tape.

**Step 1**  
Before removing the existing fitting, **carefully note the position of each set of wires.**

**Step 2**  
Referring to Fig. 1, remove the fixing bracket from the wall back and attach to the wall using the screws and wall plugs provided. Take care to avoid damaging any concealed wiring and pipes.

**Step 3**  
Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

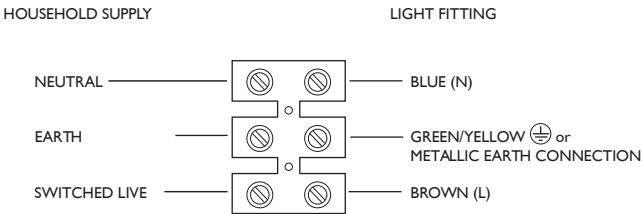


**Check that.....**  
You have correctly identified the house wires.  
The connections are tight.  
No loose strands have been left out of the connection block.

**Step 4**  
When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

**Step 5**  
Attach the product to the fixing bracket, by refitting the screws into the holes in the wall back and tightening the screws to secure. Take care not to trap or damage any wiring. Ensure the product is correctly oriented with the lampholder facing upwards.

**Step 6**  
Fit the bulb, as recommended overleaf.

**Step 7**  
Replace fuse or circuit breaker and switch on. Your light is now ready for use.

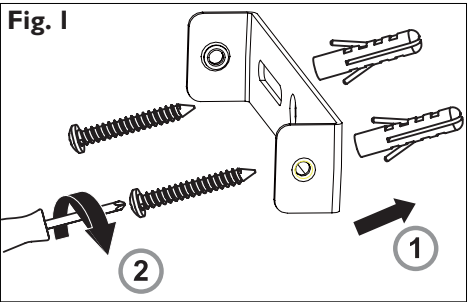

**Care Instructions**  
We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.