Recommended bulb:

9 x 1.5W G4 LED bulb

Bulb included This fitting is for use with LED G4 bulbs only

Specifications:

Max.power: 1.5W Voltage: 220~240V, 50/60Hz Weight: 3.8kg

合((🗆 🚊

Please retain these instructions for future reference.

This symbol $\stackrel{\checkmark}{\longrightarrow}$ indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.


We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please e-mail lightingparts@JLPspares.co.uk

Trouble Shooting:

Why is the light not working when switched on?

Check your power supply is switched on Turn off light and check that the bulb is inserted correctly Check the bulb is still in working order.

John Lewis Partnership 171 Victoria Street London SW1E 5NN johnlewis.com Made in China

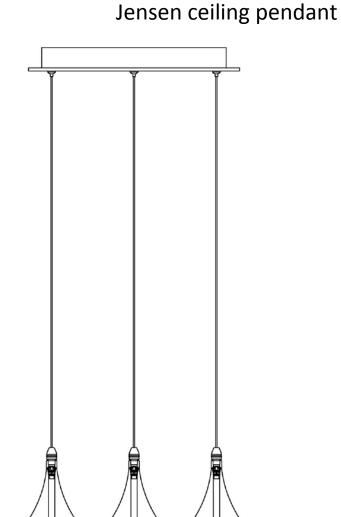

Ħ

Ħ

John Lewis User manual

Ħ

Thank you for purchasing this John Lewis Jensen 9 light LED Ceiling Pendant Light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please keep these instructions for future reference.

Warnings!

- The fitting is class II.
- This fitting should be fitted in accordance with IEE Regulations and the Building Regulations. If in any doubt, or where required by law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or from your Local Authority.
- To prevent electric shock switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- If you are in any doubt, please consult a qualified electrician.
- If replacing an existing fitting, make a note of the connections.
- Always use the correct type and wattage bulb. Never exceed the wattage stated.
- When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

CAUTION! The bulb and surrounding parts can become hot during use.

Parts list

- 2 x wall plugs
- 2 x fixing screws
- I x connector block

Instructions

- I. Ensure the house electricity supply is switched off at the fuse board.
- 2. Ensure that the bracket (supplied) is fixed to a wooden joist, or use a suitable fixing to the ceiling which will support the weight of the fitting. Please see opposite
- 3. Connect cables or terminals as shown below.

	Supply		Light Fitting
BLACK (NEUTRAL)		00	BLUE (N)
SWITCHED LIVE		© 0	BROWN (L)


Check all wires are tight in the terminal block, and no loose strands are left out. Cover with insulating tape (not included).

1. First fit bulb to the lamp holder then place the glass over the bulb and lamp holder and twist very gently into place.

The maximum power indicated must not be exceeded.

2. Press centre of the push button to adjust the height. This will allow the cable to move up and down. Switch on the electricity supply at the fuse board

Assembly

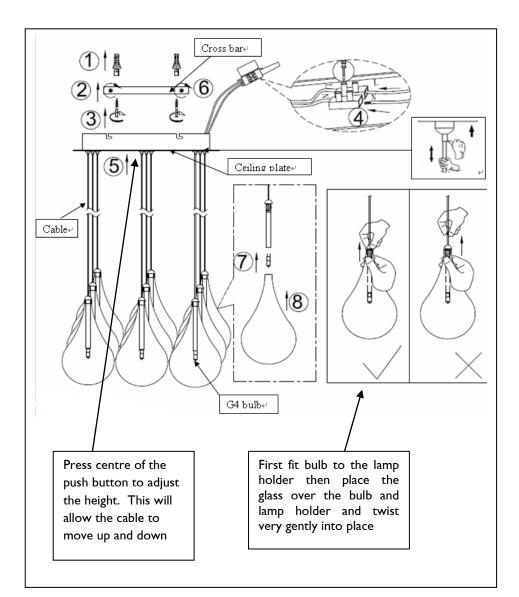

Care Instructions

- I. Indoor use only.
- 2. Non-Dimmable.
- 3. Replace bulbs from John Lewis or established brand of the same type and compatibility
- 4. Recommend the fitting should be cleaned with a soft dry cloth.