

## Recommended bulb (not included)

3 x 4W SES LED energy efficient golf

or

3 x 28W SES Eco halogen golf

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the rated power stated or use a different shape bulb from that indicated on the fitting.

## Specifications

Max. power: 40W

Voltage: 240V, 50Hz


IP Rating: IP20

Weight: 3kg



Please keep these instructions for future reference.



This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis do not operate instore take back, but as members of the Distributor Trade Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit [www.recycle-more.co.uk](http://www.recycle-more.co.uk).

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945.

John Lewis Partnership  
171 Victoria Street  
London SW1E 5NN  
[johnlewis.com](http://johnlewis.com)


Made in China

John Lewis

User manual

Selsey

Semi-flush light

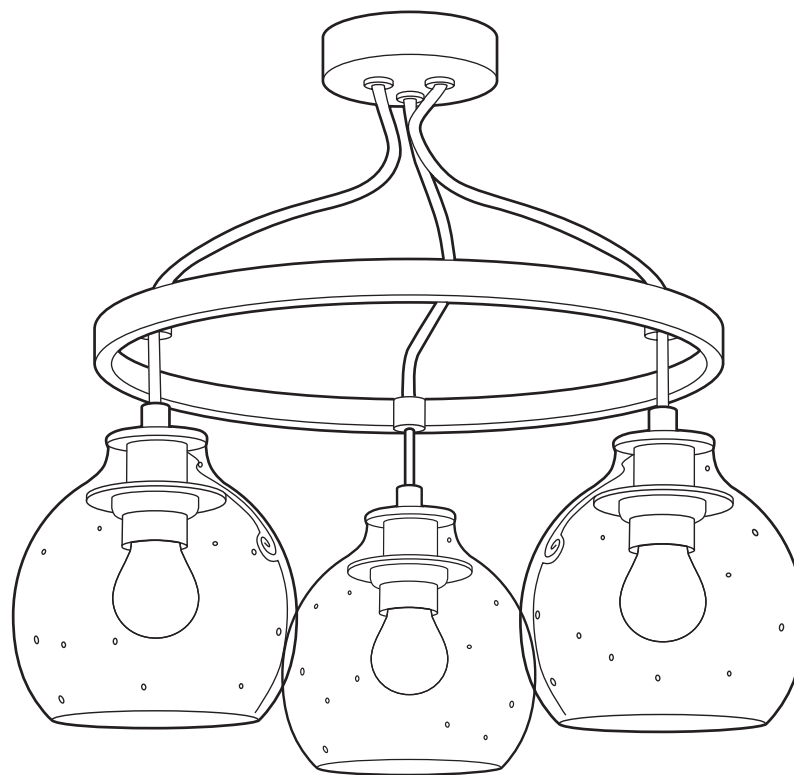

25/10/2017

Thank you for purchasing this Selsey semi-flush light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

This product is Class II (double insulated) and must not be earthed. If there are any incoming earth cables, they must be joined together and well insulated with good quality insulation tape. This is to ensure Earth continuity throughout your property.

It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electric shock switch off at mains supply before installing or maintaining this fitting.

Ensure other persons cannot restore the electrical supply without your knowledge.

If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.







If replacing an existing fitting, make a note of the connections.

This product is suitable for indoor use only, on normal flammable surfaces.

This product is suitable for use with a dimmer switch. Some energy saving bulbs are not suitable for use with a dimmer switch.

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

Always take care when handling lightbulbs to avoid injury in case of breakage.




Parts list	Image	Qty
Light fitting		1
Glass shades		3
Spacer		3
Shade ring		3
Screws		2
Wall plugs		2

Assembly

Refer to assembly drawing opposite. Carefully unpack the carton, making sure all the parts are present before assembly.

Step 1

Before removing the existing fitting, carefully note the position of each set of wires.

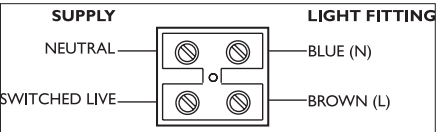

Step 2

Referring to Fig. 1, remove the fixing bracket (A) from the ceiling cover by removing the side screws (B).

Step 3

Referring to Fig. 2, attach fixing bracket to the ceiling using the fixings provided. Ensure there is a joist at the point of fixing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.

Step 4

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way.

Check that:

- You have correctly identified the house wires.
- The connections are tight.
- No loose strands have been left out of the connection block.
- The lid is fitted back onto the terminal block case.

Step 6


Attach the product to the fixing bracket using side screws (B - see Figure 1), by locating the screws in the bracket into the holes in the ceiling cover and tightening the screws to secure.

Step 7

Fit the shades (A) by carefully slotting over the lampholder, followed by the spacer (B) and secure with the shade ring (C). Take care not to allow the shades to knock together.

Step 8

Fit the bulb as per the details overleaf. Replace fuse or circuit breaker and switch on. Your light is now ready for use.

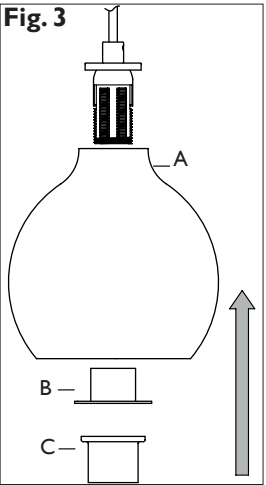

Care instructions

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.