

CURVE WALL LIGHT

USER GUIDE



Product code
702 43507

Getting started


Thank you for purchasing this Curve wall light. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings

For your safety, this product must be installed in accordance with local Building Regulations.

If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or phone your Local Authority.

To prevent electric shock, switch off the mains supply before installing or maintaining this product. Ensure other persons cannot restore the electricity supply without your knowledge.



Always use the correct bulb type with the correct wattage as indicated in the specification table. This product is Class II =  and should be fitted to a lighting Supply protected by a 5 amp fuse or equivalent circuit breaker.


When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

Caution! The bulb and surrounding parts can become hot during use.

For indoor use only.

Parts List

Ref	Description	Qty
	Screw fixings	2
	Light fitting	1

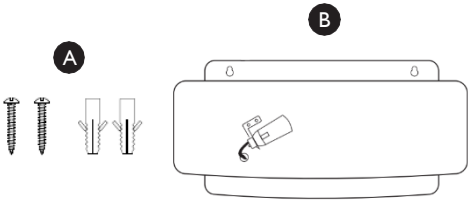

Product assembly

Step 1

Using the light fitting as a template, mark and then drill the fixing holes in the mounting surface. (ensure the fixings are firmly fixed into a suitable mounting) Attach the screws to the wall plugs using suitable screwdriver leaving the heads of the screws just proud of the wall's surface.



Step 2

Ensuring the power has been isolated, feed the household supply cable through the black rubber sleeve of the terminal block and connect the electrical supply wires to the connector blocks corresponding terminals. Support the fitting weight and make the electrical connection as follows:

- Connect the supply live (normally brown or red) to fitting live (marked "L") on the terminal block housing.
- Connect the supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block housing.


NO EARTH must be connected to any part of this fitting.

Please note that residential wiring can vary, if you are unsure about the correct polarity please consult a qualified electrician. Ensure electrical connections are tight and no loose strands of wire protrude from the terminal block then close connector block cover by snapping back together. Excess cable must be carefully located inside the rear recess of the fitting or within the wall cavity itself.

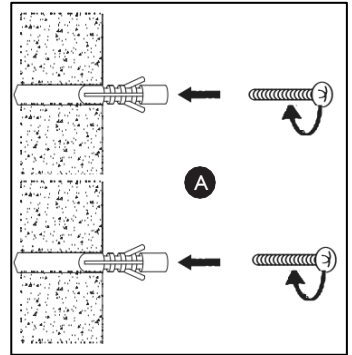

Step 3

Attach the fitting (B) to the wall by passing the screw holes in the ceramic light fitting over the screw heads earlier attached to the wall. Carefully lower the screw holes in the fitting onto the screw heads until the fitting comes to rest in the narrowest part of the hole. Note that the screw head may require adjustment to aid adequate fitment. Ensure the fit is not too tight as this may cause damage to the ceramic. Ensure no electrical wires are trapped in the process.

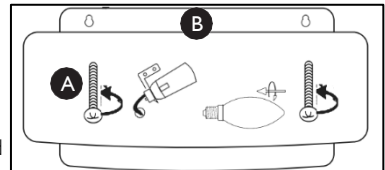


Step 4

Fit the bulb: type and wattage as indicated on the fitting

The wattage indicated must not be exceeded.

Once installation is complete, the house electricity may be restored at the fuse box.

Product information	<ul style="list-style-type: none">Indoor use onlyDimmableReplacement bulbs should be the same type and rating, available from John LewisPartners or other established brands <p>Clean the fitting with a soft dry cloth</p>
Aftercare and troubleshooting	<p>If you experience any unresolvable technical issues with the product, contact your nearest John Lewis & Partners shop or John Lewis & Partner Technical Support on 03301 230106.</p> <p>Why is the light not working when switched on?</p> <p>Check your power supply is switched on</p> <p>Turn off light and check that the bulb is inserted correctly</p> <p>Check the bulb is still in working order.</p>
Specification	<p>Max. power: 4W LED Only (250-400 lumen) Voltage: 220–240V, 50Hz</p> <p>IP rating: 20</p> <p>Weight: 1kg</p>
5-year guarantee	<p>At John Lewis & Partners we test every light to high quality standards so we are able to offer you a 5 year guarantee.</p>
Recycling	<p>This symbol  indicates that this product should not be treated as normal household waste and it should be recycled. John Lewis & Partners do not operate instore take back, but as members of the Distributor Take Back scheme have funded the development and upgrade of recycling facilities across the UK. Please take it to your nearest collection facility or for further details contact your local council or visit www.recycle-more.co.uk.</p>

John Lewis Plc
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China



Please retain these instructions for future reference