

# Louvre Outdoor Wall Light Installation Instructions

Thank you for purchasing this Louvre light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Please keep these instructions for future reference

### **Warnings!**

**This is a Class I product and must be earthed.**

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations and the Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling.

Dispose of used bulbs carefully.

This product is suitable for outdoor use only, and is IP44 rated.

### **Fixing Instructions**

Make sure you have the following items which are required to install this light fitting:

Small electrical screwdriver, cross head screwdriver & insulation tape.

### **Step 1**


Remove the finials from the front of the product and lift the light fitting body away from the wall back. Keep the rubber washers and finials in a safe place for use later.

### **Step 2**

Using the wall back as a template, mark the position of the mounting holes. Make sure the drain hole is at the bottom. Drill holes and fit supplied wall plugs (suitable for masonry only - for other surfaces use appropriate fixings). Feed the incoming mains supply cable through the grommet entry hole. Fix the wall back to the wall using the supplied screws.

### **Step 3**


Connect to the connection block inside the product in the following way:

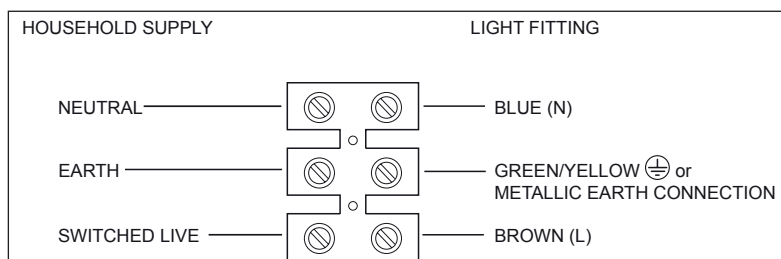

Ensure wiring connections are tight. Ensure earth wire is correctly fitted to the earth connection. Make sure the incoming mains cable is kept away from the heat of the lamp and that the grommet is still in place to maintain the IP rating.

#### Step 4


Place the light fitting over the threads of the securing screws and refit the rubber washers and finials to secure. Make sure the fitting is correctly oriented with the lampholder pointing downwards.

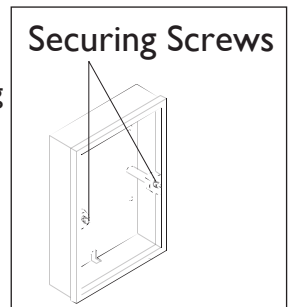

#### Step 5 - Fitting the bulb

Bulb type - Max. 40W E27 GLS bulb or energy saving equivalent.  
When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.


To fit the bulb firstly remove the glass plate at the base of the product by unscrewing the screws in each corner. Once the bulb is fitted, retighten the screws to reattach the glass plate. Make sure the screws are securely fastened to ensure a tight seal around the edges of the shade and consequently effective ingress protection.



The glass shade must be replaced if it becomes cracked or damaged. Do not use the product without the glass shade attached.

#### Step 6

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

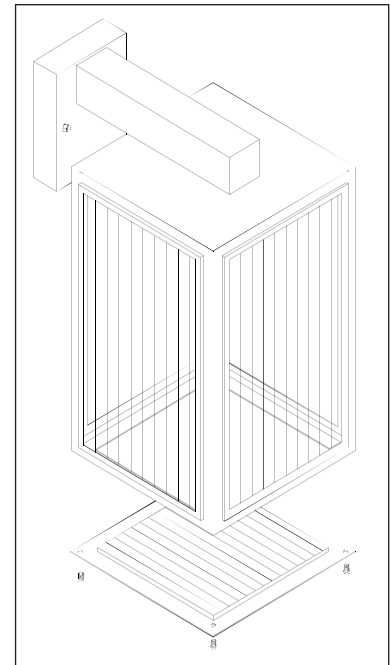

#### Care and cleaning

Finish - Do not use abrasive materials and cleaners on these products as this may damage the finish. Do not clean the unit with a pressure washer.

Glass parts - Wash in warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

#### Safety Information

For your safety, always switch off the supply before changing lightbulbs, cleaning or removing shades.

We have taken great care to ensure that this product reaches you in perfect condition. However, should any parts be damaged or missing please contact our Product Helpline on (01202) 690945. We will despatch to you, within 7 working days, your missing/damaged part. When phoning please ensure you have the following information available: Name and Address, Daytime Telephone Number, Store and Date of Purchase, Product Reference (inside ceiling cover or on box label), Description of Missing/Damaged Part. This does not affect your statutory rights.