



John Lewis


User manual
Meadow
Shaded pendant

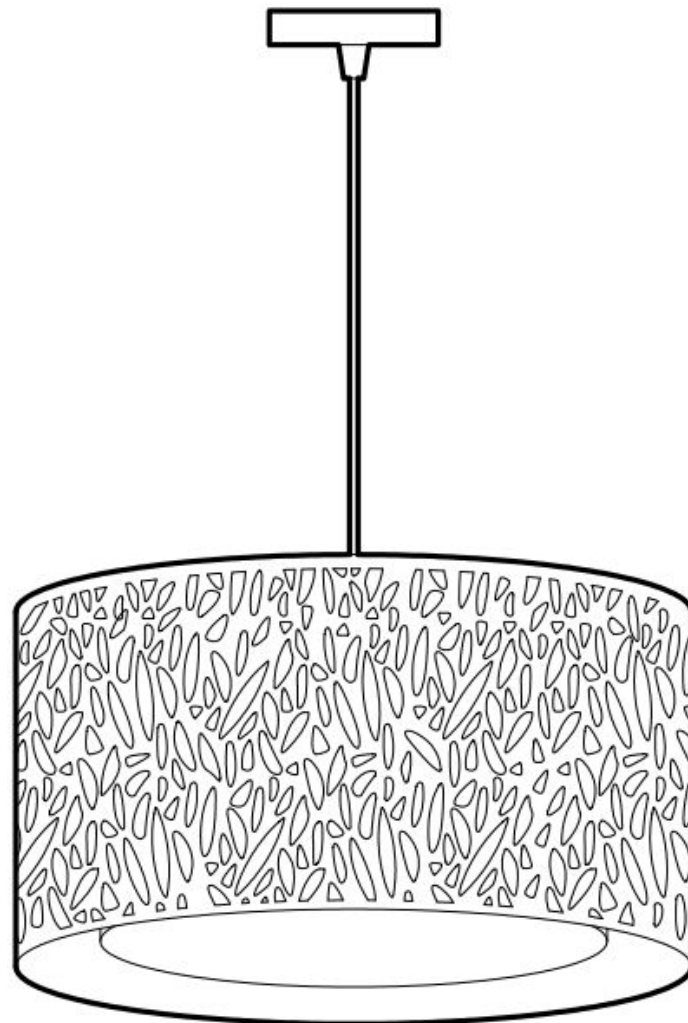

Thank you for purchasing this Meadow shaded pendant. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product.

Warnings!

- ❖ For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or phone your Local Authority.
- ❖ To prevent electric shock, switch off the mains supply before installing or maintaining this product. Ensure other persons cannot restore the electricity supply without your knowledge.
- ❖ Always use the correct bulb type with the correct wattage as indicated in the specification table. Never exceed the Max. power rating. When changing a bulb always switch off at the mains first and allow the bulb to cool down before handling. Dispose of used bulbs carefully. The bulb and surrounding parts can become extremely hot during use.
- ❖ This product is Class II =  and should be fitted to a lighting Supply protected by a 5 amp fuse or equivalent circuit breaker.
- ❖ For indoor use only.

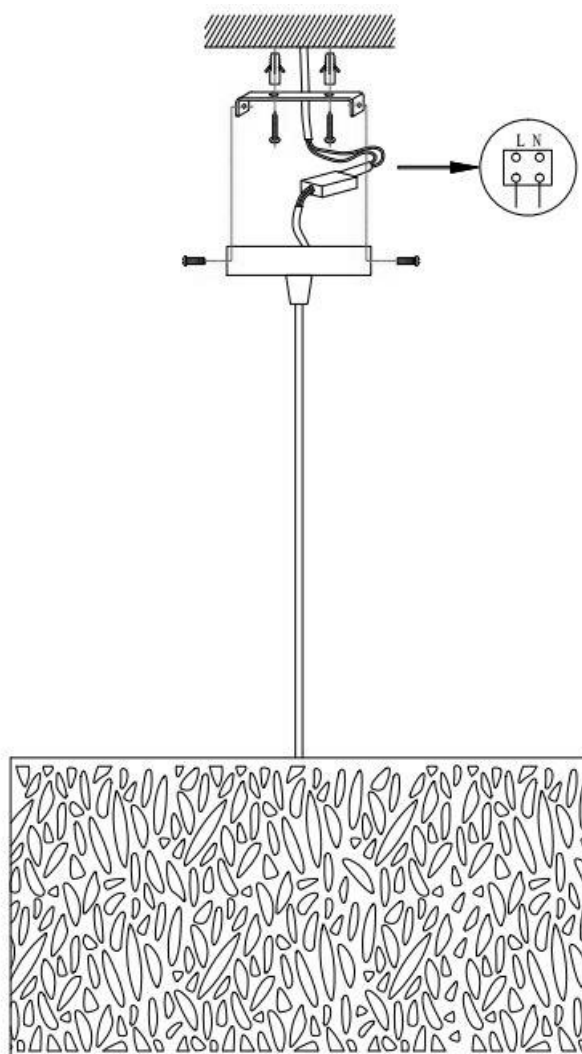

Assembly

Never install your appliance on a wet, freshly painted or plastered surface.

Ensure the house electricity supply is switched off at the fuse box.

If removing an existing fitting, note down all wiring connections.

Follow the diagram below for fixing detail.

Check the fixings will not touch any existing wiring before drilling and attaching the light to the wall.

Ensure you thread the wall wires through the black insulating tube fixed to the appliance.

1. Ensure the house electricity supply is off at the fuse board.
2. If removing an existing fitting, first note down all wiring connections.
3. Remove mounting bracket from fitting by removing the retaining screws and washers, retain for later.
4. Using the mounting bracket as a template, mark and then drill the fixing holes in the ceiling (ensure holes are drilled into a secure joist). **Take care not to damage wiring.**
5. Attach mounting bracket to the mounting surface using suitable fixings. Do not attach fitting to mounting bracket at this stage. Make sure no wires are trapped in the process.
6. **This fitting is height adjustable at point of installation only. No attempt must be made to adjust the height once it has been attached to the ceiling. If adjustment is required at a later date the fitting must be isolated from the mains and removed from the ceiling first.**

Lay the fitting on a clear covered surface. Using a suitably sized flat bladed screwdriver loosen the plastic screw clamp under the ceiling cup, also undo the screws in the clamp located in the ceiling cup. Carefully pull the cable through the ceiling cup to the desired height and then retighten all screws to ensure that clamps are fully secured.

7. Lever open the terminal block box cover with a screwdriver then feed supply cable through rubber sleeving and make electrical connections as follows:

Connect supply live (normally brown or red) to fitting live (marked "L") on the terminal block.

Connect supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.

NO EARTH must be connected to any part of this fitting. If there are any earth wires present in the ceiling these must be terminated into a separate terminal block (not supplied) to ensure continuity of the earth circuit is maintained.

Ensure electrical connections are tight and no loose strands of wire are left out of the connector block and the rubber sleeve is seated correctly.

NOTE: Ensure electrical connections are tight and no loose strands of wire are left out of the connector block. Ensure terminals and rubber sleeve are correctly seated then close connector block housing.

8. Excess cable must be carefully located inside ceiling cup or within the ceiling void. Carefully offer fitting over mounting bracket then secure in place with the screws and washers removed earlier.
9. To fit the shade: Remove the shade ring already attached to the lamp holder, place the shade over the top of the lamp holder and replace the shade ring to secure in place. Take care not to over tighten as this may cause damage to the fitting.
10. Fit the bulb, type and wattage as displayed on the fitting. **The stated wattage must not be exceeded.**

Once installation is complete, the house electricity may be restored at the fuse box.

Care instructions

Wipe clean with a clean dry cloth, when product is switched off and has cooled down.

Recommended bulb

1 x 42W E27 (ES) eco halogen GLS bulb

Or

1 x 11W energy saving spiral bulb

Specifications

Max. Power: 60W

Voltage: 230V, 50Hz

Weight: 1.4kg



Please retain these instructions for future reference.

John Lewis Partnership
171 Victoria Street
London SW1E 5NN
johnlewis.com

Made in China

Issue 1 10/16